





TOBILED[®] 2024

Motion sensor rechargeable
night light / cabinet light

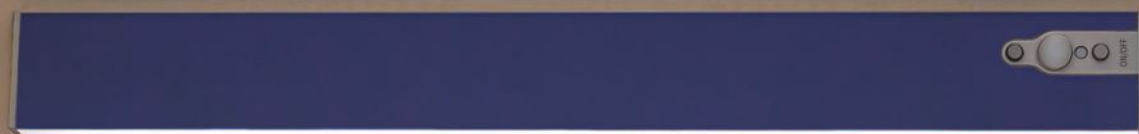

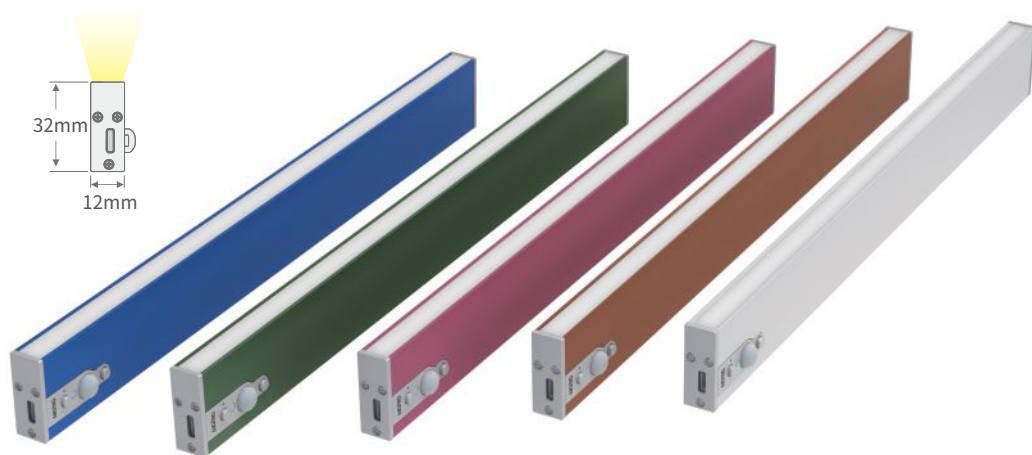

Linear L1232 Motion sensor rechargeable night light / cabinet light

Material: Aluminum housing with PC diffuser

Housing finishing: Powder coating with Blue/Green/Pink/Orange/White color
(different color is available on request)

Power: 1W

Input voltage: DC5V/2A

Color temperature: 1800-4000K

CRI > 90

Battery charging time: 3-4hours



Working time with battery : 6-7 hours at full load, 35-40 hours at minimum load (0.1W)

Type C USB connector

Dimmable, flicker-free

IP rating: IP20

It is fixed with magnets and requires no screw fixing

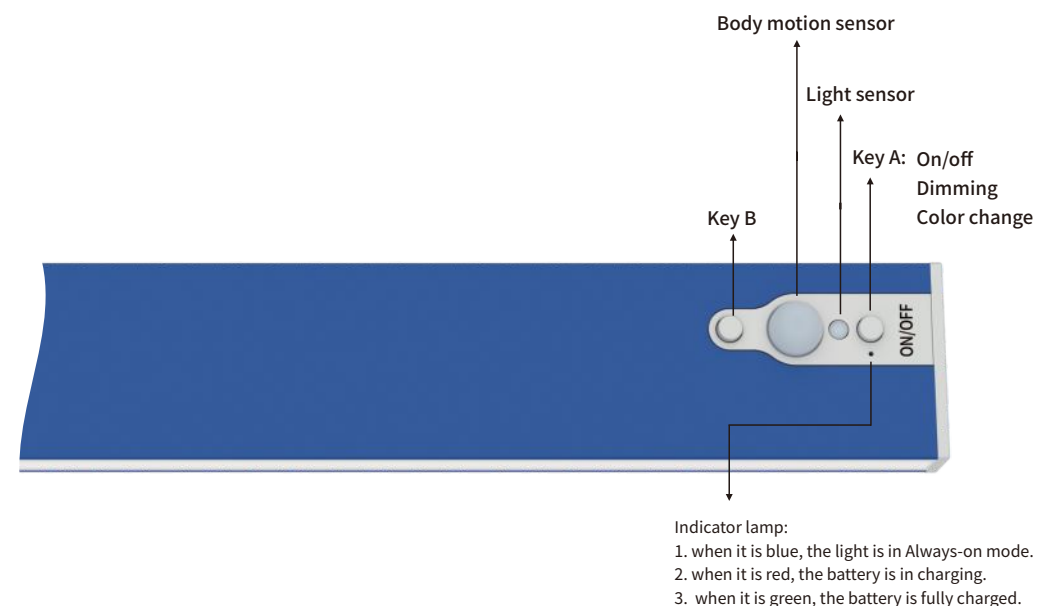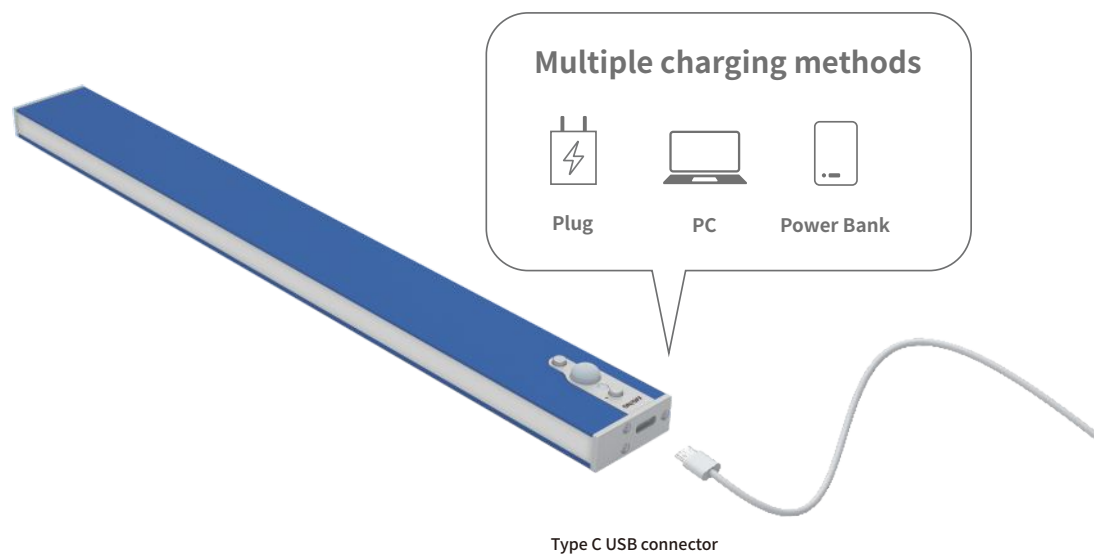








Key A operations :

1. Press Key A quickly to turn it on /off
2. Press and hold Key A 1 seconds for dimming (from 10%-100%)
3. Press Key A twice quickly to change the color between 1800K and 4000K
4. Press Key A twice, holding the key a bit longer on the second press to change the color from 1800K to 4000K

Key B operations:

1. Press and hold Key B more than 3. seconds to enter the Body-sensing mode or Always-on mode
(the blue light near to the motion sensor will turn on)

 <p>1.5m sensing distance 120°induction range 20s delay light</p>	 <p>Magnets attach directly to metal surfaces</p>	 <p>Stick on wall with adhesive metal plates</p>
 <p>IP Rating</p>	 <p>Color temperature changeable 1800~4000K</p>	 <p>2000mAh large capacity lithium battery DC5V/2A 3-4hours charging time</p>

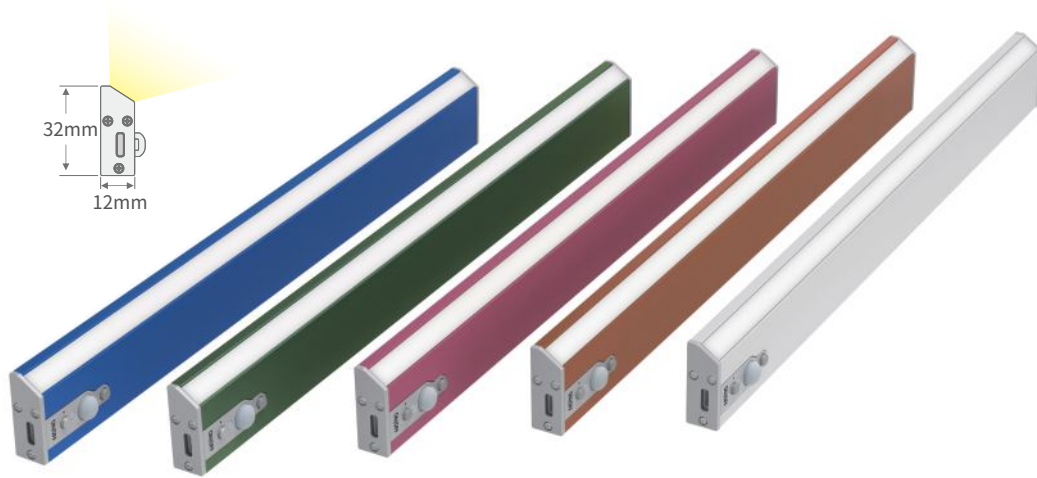

Linear L1232S Motion sensor rechargeable night light / cabinet light

Material: Aluminum housing with PC diffuser

Housing finishing: Powder coating with Blue/Green/Pink/Orange/White color
(different color is available on request)

Power: 1W

Input voltage: DC5V/2A

Color temperature: 1800-4000K

CRI > 90

Battery charging time: 3-4hours



Working time with battery : 6-7 hours at full load, 35-40 hours at minimum load (0.1W)

Type C USB connector

Dimmable, flicker-free

IP rating: IP20

It is fixed with magnets and requires no screw fixing

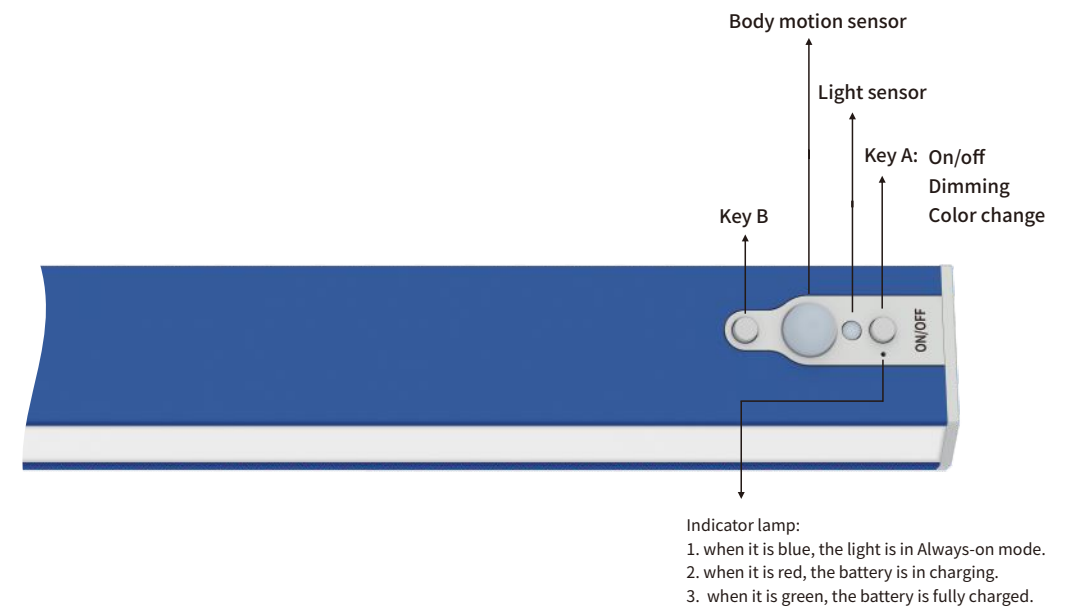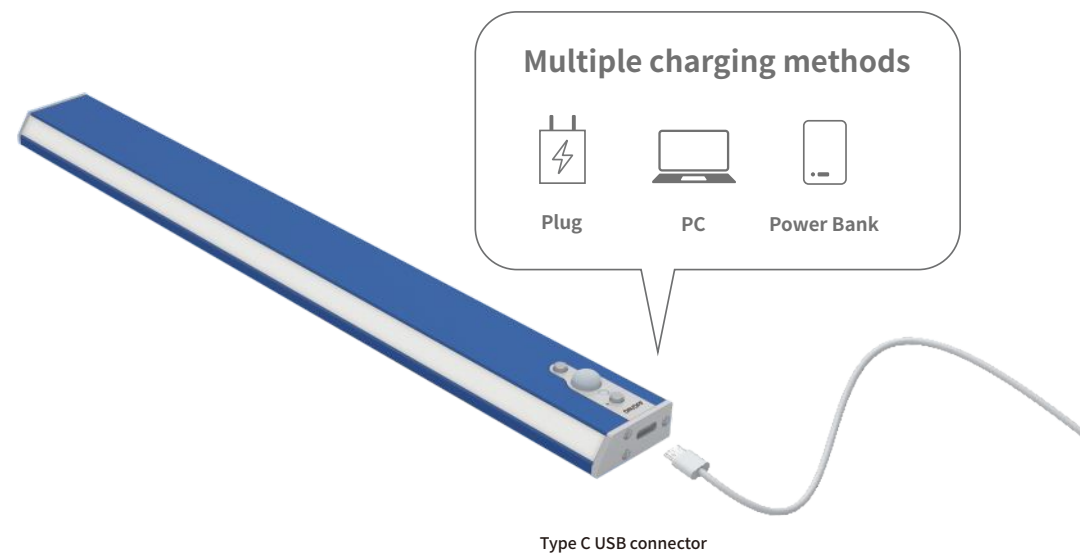







Key A operations :

1. Press Key A quickly to turn it on /off
2. Press and hold Key A 1 seconds for dimming (from 10%-100%)
3. Press Key A twice quickly to change the color between 1800K and 4000K
4. Press Key A twice, holding the key a bit longer on the second press to change the color from 1800K to 4000K

Key B operations:

1. Press and hold Key B more than 3. seconds to enter the Body-sensing mode or Always-on mode
(the blue light near to the motion sensor will turn on)

 <p>1.5m sensing distance 120°induction range 20s delay light</p>	 <p>Magnets attach directly to metal surfaces</p>	 <p>Stick on wall with adhesive metal plates</p>
 <p>IP Rating</p>	 <p>Color temperature changeable 1800~4000K</p>	 <p>2000mAh large capacity lithium battery DC5V/2A 3-4hours charging time</p>



Linear L3223C Motion sensor rechargeable night light / cabinet light

Material: Aluminum housing with PC diffuser

Housing finishing: Powder coating with Blue/Green/Pink/Orange/White color
(different color is available on request)

Power: 1W

Input voltage: DC5V/2A

Color temperature: 1800-4000K

CRI > 90

Battery charging time: 3-4hours


Working time with battery : 6-7 hours at full load, 35-40 hours at minimum load (0.1W)

Type C USB connector


Dimmable, flicker-free

IP rating: IP20

It is fixed with magnets and requires no screw fixing

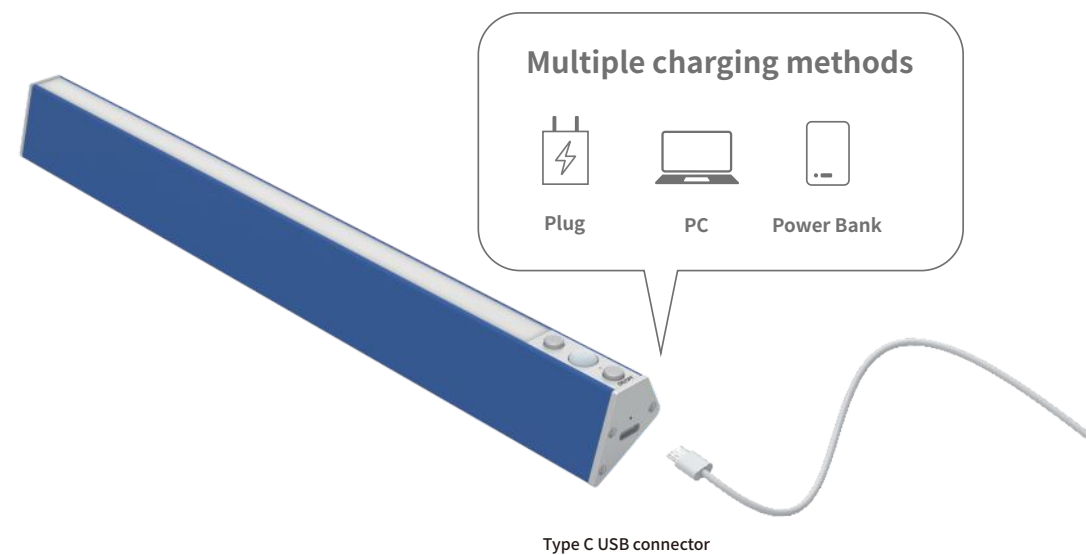

Type C USB connector

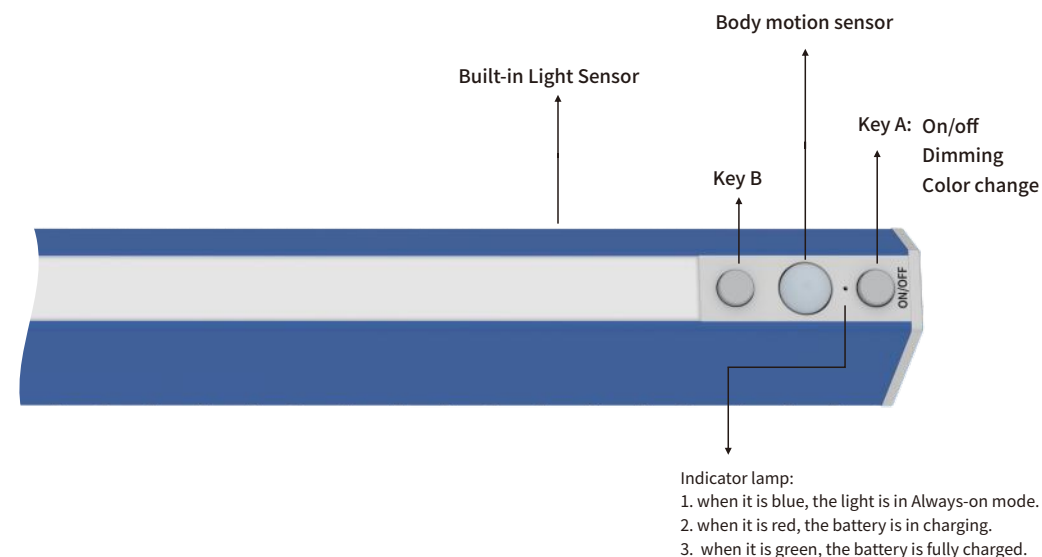







Key A operations :

1. Press Key A quickly to turn it on /off
2. Press and hold Key A 1 seconds for dimming (from 10%-100%)
3. Press Key A twice quickly to change the color between 1800K and 4000K
4. Press Key A twice, holding the key a bit longer on the second press to change the color from 1800K to 4000K

Key B operations:

1. Press and hold Key B more than 3. seconds to enter the Body-sensing mode or Always-on mode
(the blue light near to the motion sensor will turn on)

 <p>1.5m sensing distance 120°induction range 20s delay light</p>	 <p>Magnets attach directly to metal surfaces</p>	 <p>Stick on wall with adhesive metal plates</p>
 <p>IP Rating</p>	 <p>Color temperature changeable 1800~4000K</p>	 <p>2000mAh large capacity lithium battery DC5V/2A 3-4hours charging time</p>