

TOBILED® 2024

No.5 building, Qingwan industrial zone, Sanzao Town, Jinwan District,
Zhuhai City, Guangdong province, China, 519040

Contact No.: 0086-756-6805251/6805252/6805253/6805254/
6805465/6805310;

Email: info@tobiled.com www.tobiled.com Fax: 0086-756-6805559

TOBILED CO., LIMITED ALL rights reserved.
Designs and specifications may change without prior notice.



Ut90 "clip in" (with patent) linear panel light system, easy to fix, super slim, 220-240V with DALI /1-10V dimming function, with our Y, L, T connector, it is flexible for customer to design different shape. UGR<19, perfect use for mall, supermarket, office and so on, can be installed by ceiling, mounting, suspending, and track system.



clip in with magnetic

Installation Methods




Suspended






Surface mounting

UT90 AL1 For Surface Mounting / Suspending


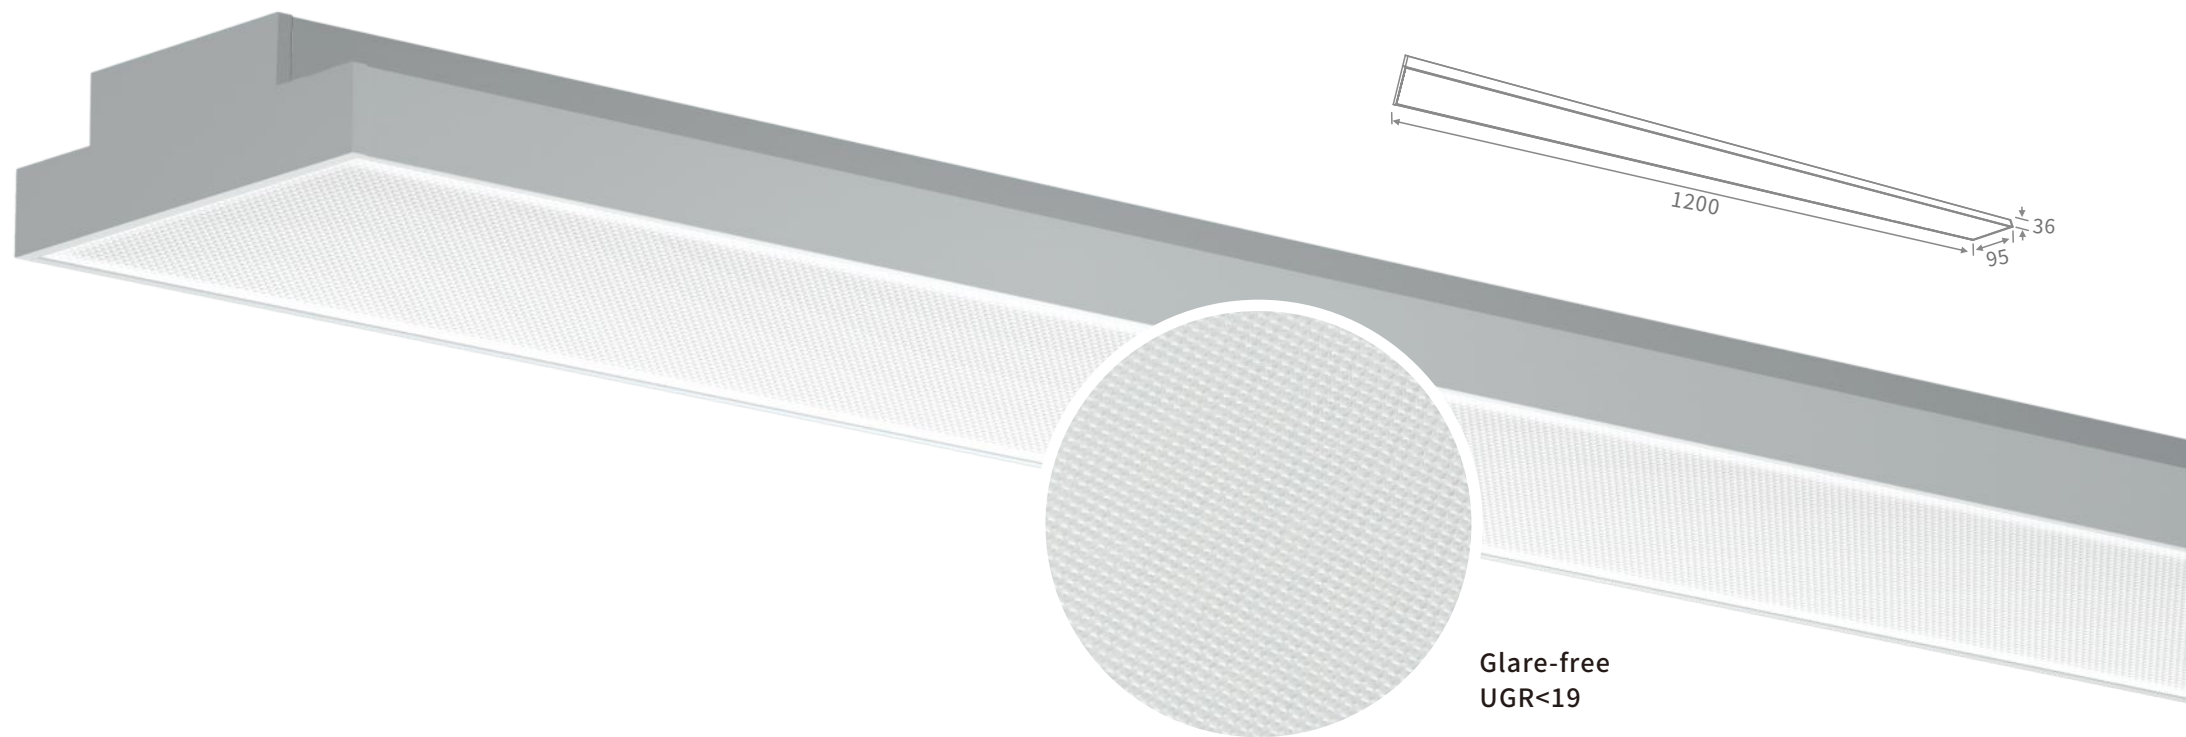


Glare-free
UGR<19

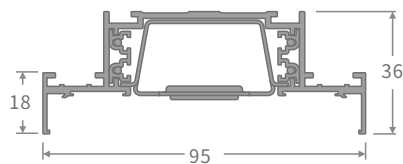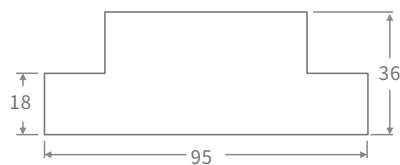


Basic Parameter	
Dimension	L1200*W95*H36mm
Input Voltage	220-240VAC
Power	18.5 W
Luminous Efficiency	89.7 Lm/W (CCT:3000K,CRI>90)
IP Class	IP40
Beam Angle (50%)	80 °
CCT	2700K/3000K/3500K/4000K
CRI	≥80,≥90
Dimmable	DALI / 1-10V
Warranty	5 years






UT90AL1-L Connector

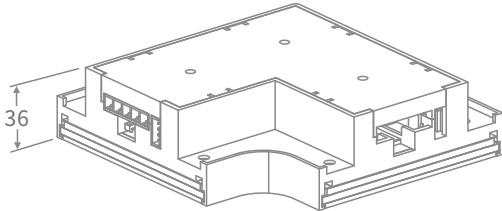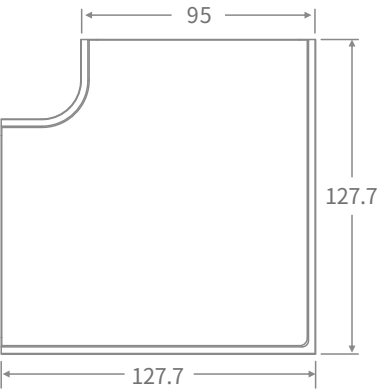

Connecting Shapes

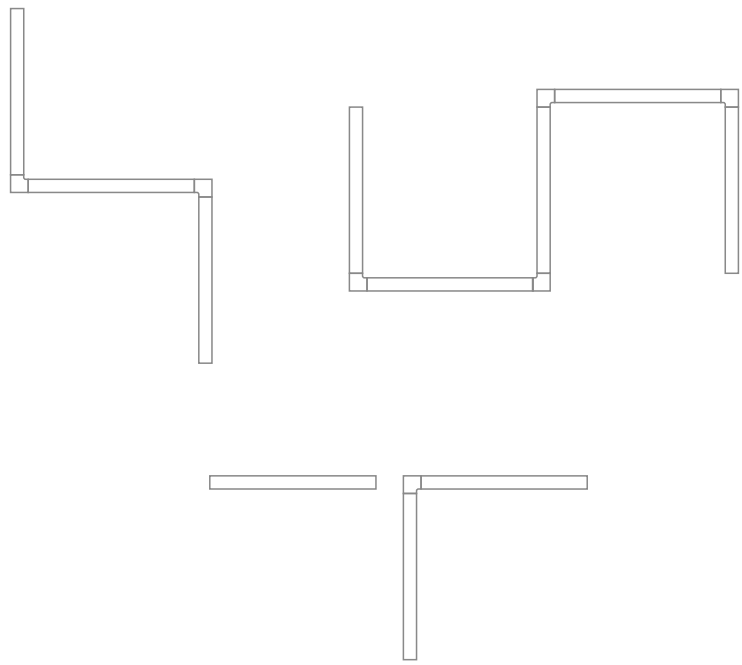






UT90 Spot 1

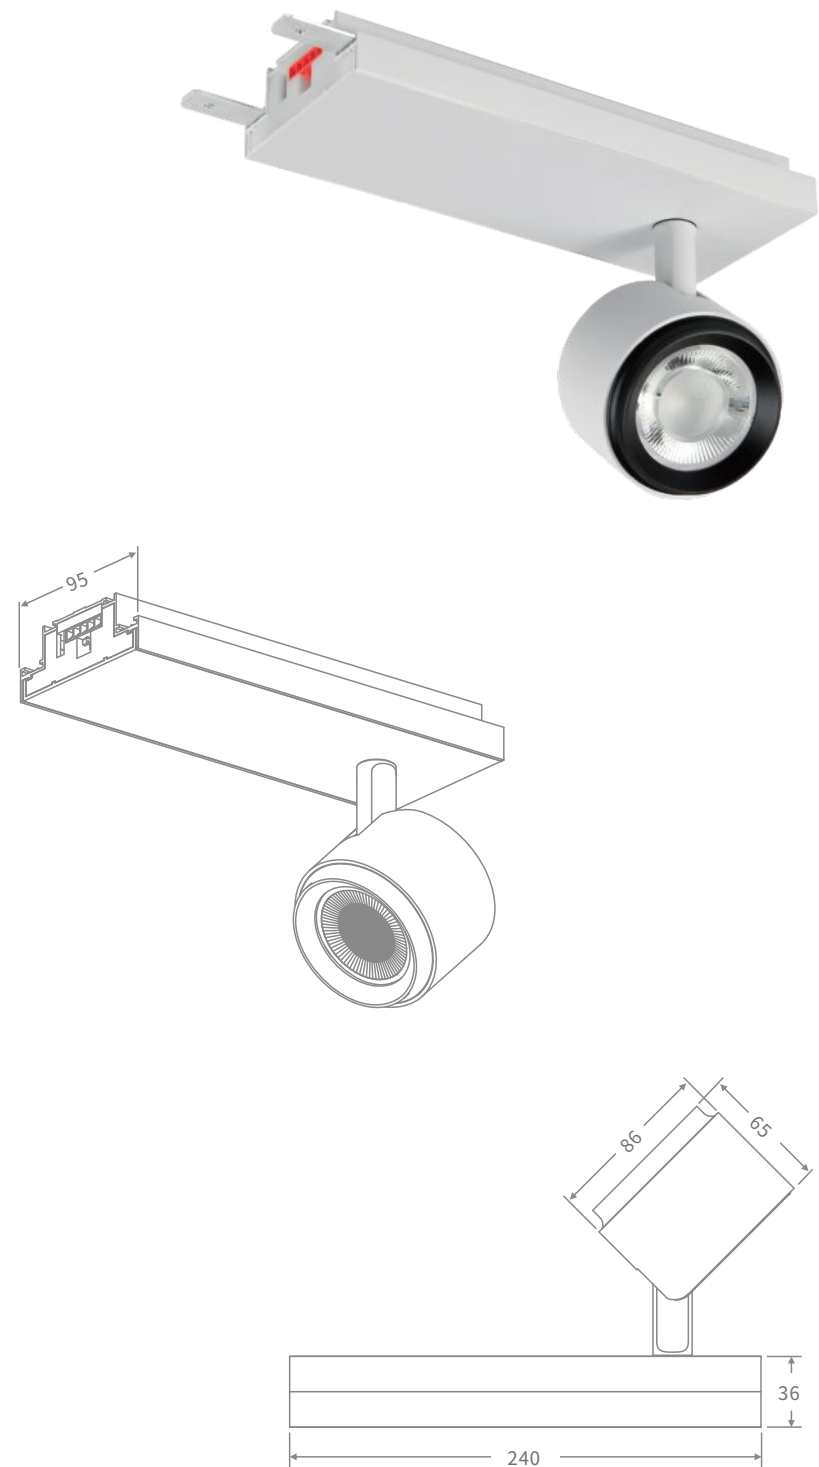

Basic Parameter

Dimension	L240*W95*H36mm
Input Voltage	220-240VAC
Power	12 W
Luminous Efficiency	65 Lm/W (CCT:3000K,CRI>90,15°)
IP Class	IP40
Beam Angle (50%)	15° / 20° / 30° / 60°
CCT	2700K/3000K/3500K/4000K
CRI	≥80,≥90
Dimmable	DALI
Warranty	5 years

UT90 Spot 2

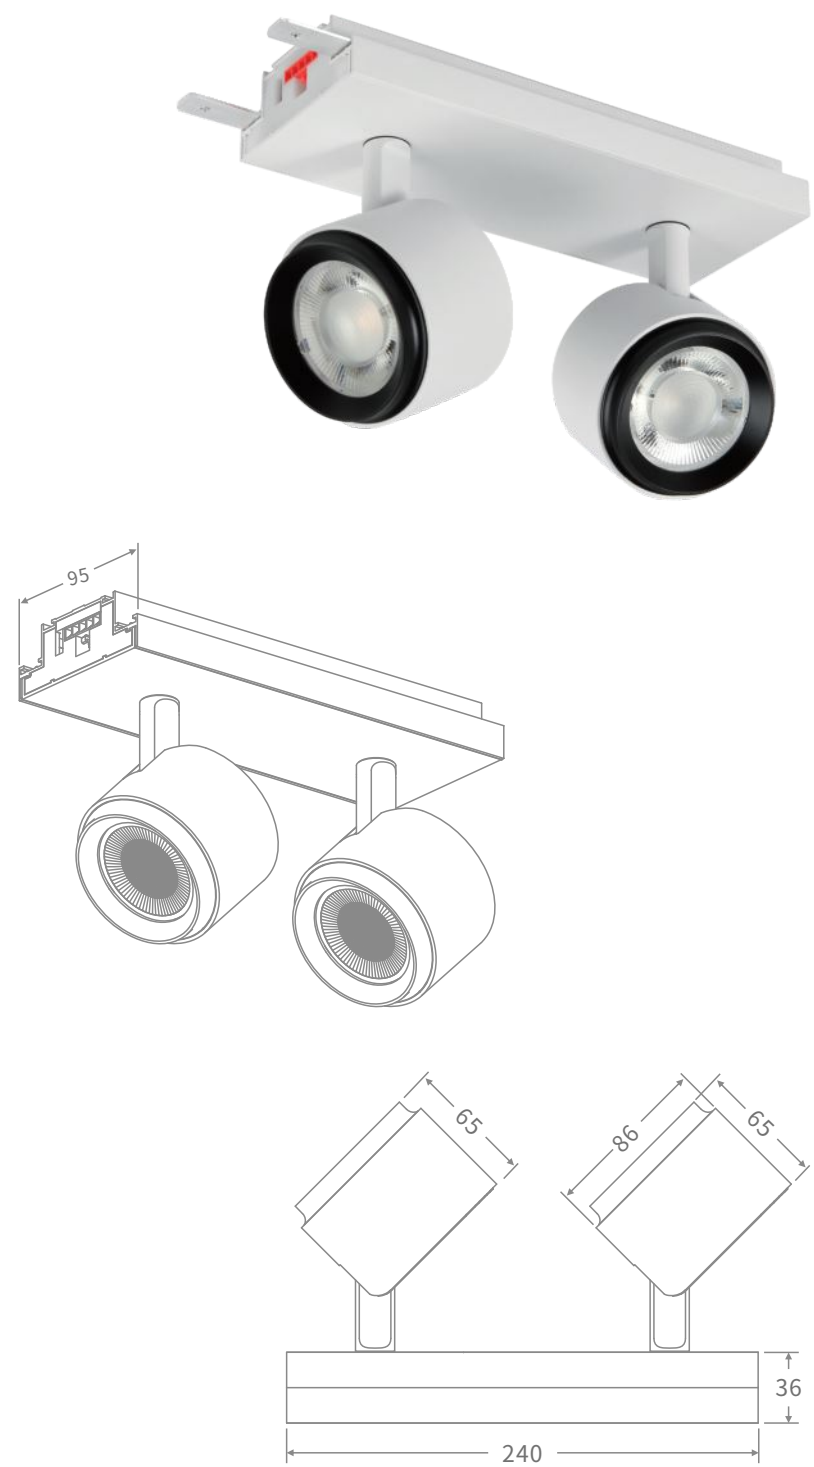

Basic Parameter

Dimension	L240*W95*H36mm
Input Voltage	220-240VAC
Power	8+8 W
Luminous Efficiency	65 Lm/W (CCT:3000K,CRI>90,15°)
IP Class	IP40
Beam Angle (50%)	15° / 20° / 30° / 60°
CCT	2700K/3000K/3500K/4000K
CRI	≥80,≥90
Dimmable	DALI
Warranty	5 years





UT90 AL2 For Ceiling



Basic Parameter

Dimension	L1200*W108*H13mm
Input Voltage	220-240VAC
Power	18.5 W
Luminous Efficiency	89.7 Lm/W (CCT:3000K,CRI>90)
IP Class	IP40
Beam Angle (50%)	80 °
CCT	2700K/3000K/3500K/4000K
CRI	≥80,≥90
Dimmable	DALI / 1-10V
Warranty	5 years

Removable UT90 Track light

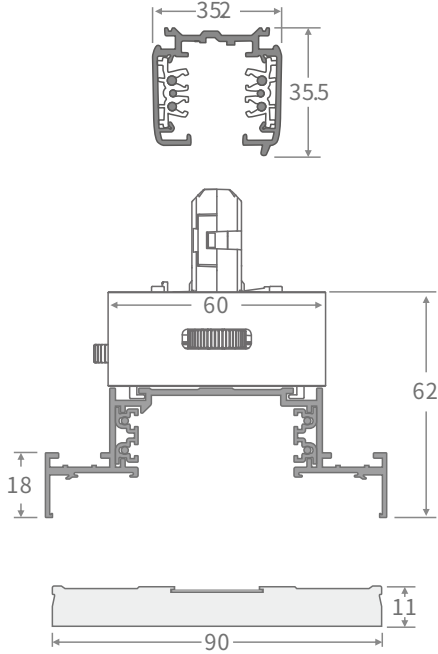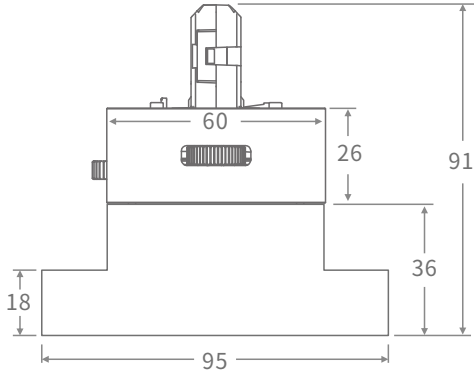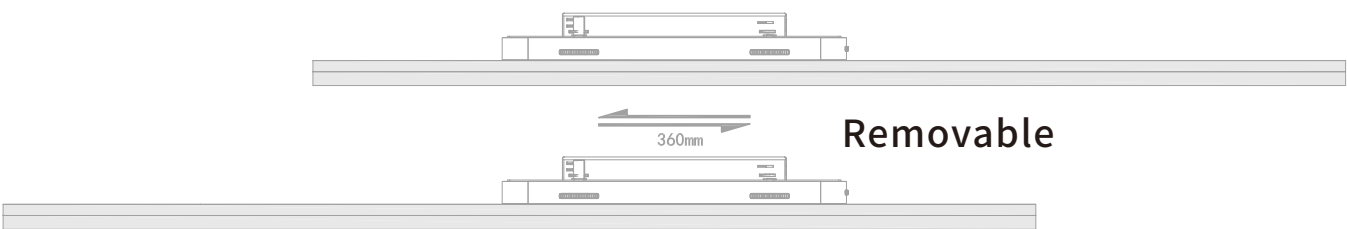

Input Voltage
Power

Basic Parameter	
Dimension	L1200*W95*H62mm
Net Weight	3.39kg
Input Voltage	220-240VAC
Power	20 W
Luminous Efficiency	106.3 Lm/W (CCT:3000K,CRI>80)
IP Class	IP40
Beam Angle (50%)	80 °
CCT	2700K/3000K/3500K/4000K
CRI	≥80,≥90
Dimmable	DALI / 1-10V
Warranty	5 years

