


TOBILED®

LED PROFILE

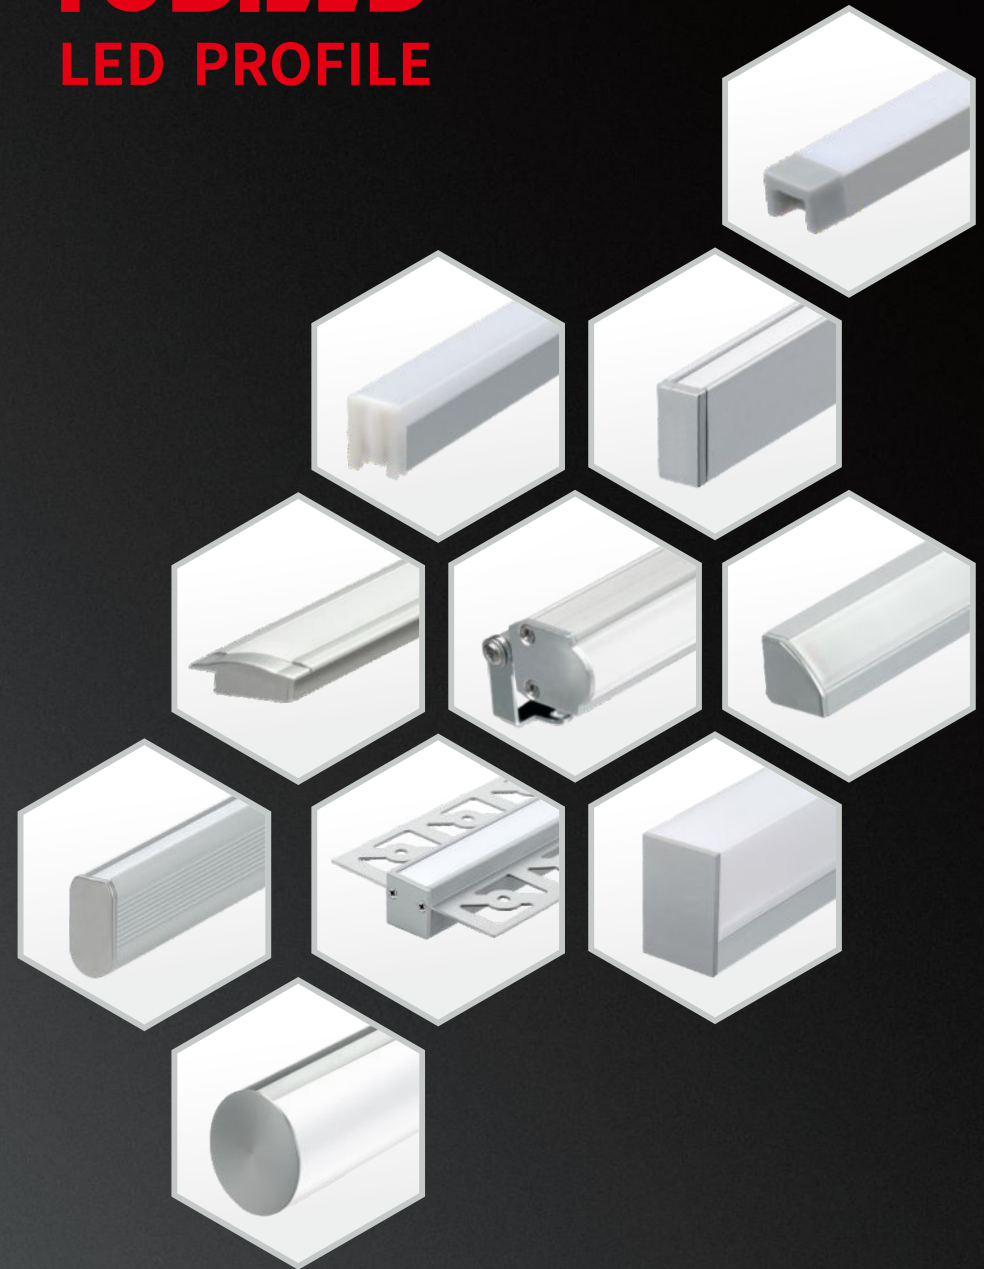

No.5 building, Qingwan industrial zone, Sanzao Town, Jinwan District,
Zhuhai City, Guangdong province, China, 519040

Contact No.: 0086-756-6805251/6805252/6805253/6805254/
6805465/6805310;

Email: info@tobiled.com www.tobiled.com Fax: 0086-756-6805559

TOBILED CO., LIMITED ALL rights reserved.
Designs and specifications may change without prior notice.




2024

TOBILED TOBILED was founded in 2008 and located in Zhuhai City , with a factory area of more than 6,000m² and 90-100 employees. It is a company specializing in the design and manufacture of LED lighting fixtures. The company owner is German, all products are produced with the EU RoHS directive standards. We have obtained certifications of ISO9001:2015, UL, ETL and CETL. Our products are sold to all over the world. Environmental protection, occupational safety and health are our main focus and responsibility. TOBILED reports sewage discharge to government every year and arranges safety production training to ensure our employees, safety and health, also reduces our discharge to non-toxic, non-pollution to the environment as social liability.



GO-2000 GONIOPHOTOMETER

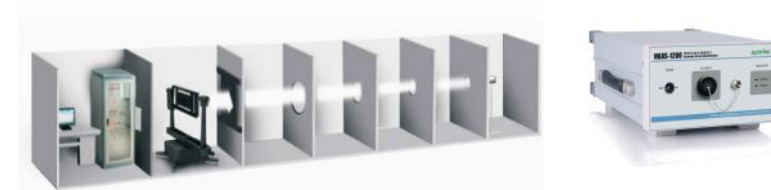

HAAS-1200 Accurate spectroradiometer




LED strip




Flexible LED Strip 8

IP64 LED Profile



WP08AL1 12




WP06AL1 13


LED Profile 8-30mm width




AP4105 14




AP4101 15




AP3401 16




AP4106 17




AP3413 18




AP3412 19




AP4103 20




AP3410 21




AP4104 22




AP3411 23




AP3402 24




AP3403 25



AP0101 26




AP11 27




AP21 28


Recessed LED Profile




AP0202 30



AP32 31




AP3404 32




AP12 33


Corner LED Profile




AP0302 34



AP0303 35



DP14 36




AP1303 37

Asymmetric LED Profile




TP03A 70° 38




AP4501 39


LED Profile with beam angle




AP4102 40




AP0705 41



AP0702 42




AP0701 43




AP0703 44

Wardrobe LED Profile




CP02(AP3701) 45




CP03(AP3702) 46



AP27 47




AP2701 48




AP13 49

Step light LED Profile




DP01(AP4301) 50


Plaster construction LED Profile




DP06(AP3301) 51




DP07(AP3304) 52



DP10(AP3305) 53



DP08(AP1201) 54



DP11(AP3601) 55

LED Profile with 35-100 mm width

OP3503 56

OP3504 57

OP3502 58

OP3506 59

OP04 (AP2402) 60

OP03 (AP2401) 61

OP07 (AP1901) 62

OP08 (AP1902) 63

OP01 (AP3801) 64

OP02 (AP3802) 65

PC Cover

PC11-7 16

PC14-10 45

PC12-11 53

AP3413-13-5 18

AP4105-8 14

PC32-9 15

PC03-15 46

AP4103-18 20

PC04-24 35

PC33-35 59

AP4104-27 22

AP3412-14 19

PC18-50 63

PC20-35 57

PC Cover

PC07-13 47

PC19-D50 62

PC09-D16 48

PC15-D60 64

PC16-D100 65

PMMA Cover

PA21-16 23

PA01-9 15

PA02-15 26

PA04-24 28

PA10-43 63

PAB06-9 40

PAB05-15 42

PAB02-15 42

PA05-20F 21


PAB04-16 39

PA09-18 53

Features:

- 1. 3step LED, CRI>80, CRI>90, 95 are available on request. We are using 2OZ copper for our PCB.
- 2. Standard length: 5m/Reel
- 3. With 3M double tape on the bottom
- 4. Working TempeRature: 0-40°C
- 5. IP Rate Available: IP20, IP65/67/68
- 6. OpeRating Voltage: DC 12V/24. 48V is available on request.
- 7. WarRanty: 5years for IP20, 3years for IP65/ IP67/IP68
- 8. To advoid LED dots, we suggest to use LED strip which minimum 120pcs LED per meter.
- 9. LED strip which is ≥15W/M we suggest to use with cooling plate.

Part No	Color	LED (SMD)	Cutting Length	Pcb Width	Length	LED Q'ty	Max. Power	Lm/NM
								
V242120D	CW/NW/WW	3step 2835LED	24V(50mm,6pcs)	6mm	1000mm	120leds/m 600leds/5m	20W/m 100W/5m	105-110lm/W
								
V242120E	CW/NW/WW	3step 2835LED	24V(50mm,6pcs)	8mm	1000mm	120leds/m 600leds/5m	20W/m 100W/5m	105-110lm/W
								
V242140E	CW/NW/WW	3step 2835LED	24V(50mm,7pcs)	8mm	1000mm	140leds/m 700leds/5m	20W/m 100W/5m	130lm/W
								
V123240E	CW/NW/WW	3step 3528LED	12V(12.5mm,3pcs)	8mm	1000mm	240leds/m 1200leds/5m	17W/m 85W/5m	105-110lm/W
								
V242120A	CW/NW/WW	3step 2835LED	24V(50mm,6pcs)	10mm	1000mm	120leds/m 600leds/5m	25W/m 125W/5m	105-110lm/W

Part No	Color	LED (SMD)	Cutting Length	Pcb Width	Length	LED Q'ty	Max. Power	Lm/NM
								
V242240C	CW/NW/WW	3step 2835LED	24V(25mm,6pcs)	12mm	1000mm	240leds/m 1200leds/5m	50W/m 250W/5m	105-110lm/W
								
V242240B	CW/NW/WW	3step 2835LED	24V(50mm,12pcs)	15mm	1000mm	240leds/m 1200leds/5m	50W/m 250W/5m	105-110lm/W
								
V242280I	CW/NW/WW	3step 2835LED	24V(50mm,14pcs)	16mm	1000mm	280leds/m 1400leds/5m	50W/m 250W/5m	125-130lm/W
								
V244120H	CW/NW/WW	3step 3014LED	24V(50mm,6pcs)	3mm	1000mm	120leds/m 600leds/5m	10W/m 50W/5m	\
								
V244240E	CW/WW tunable white	3step 3014LED	24V(50mm,12pcs)	8mm	1000mm	240leds/m 1200leds/5m	10W/m 50W/5m	90-105lm/W
								
V246300D	CW/NW/WW	3step 2016LED	24V(20mm,6pcs)	7mm	1000mm	300leds/m 1500leds/5m	40W/m 200W/5m	105-110 lm/W
								
V246300E	CW/NW/WW	3step 2016LED	24V(20mm,6pcs)	8mm	1000mm	300leds/m 1500leds/5m	40W/m 200W/5m	105-110lm/W



Part No	Color	LED (SMD)	Cutting Length	Pcb Width	Length	LED Q'ty	Max. Power	Lm/NM
V242(5)108RGBWWCW	RGBWW	5060RGB 2835LED	24V(166.67mm,18pcs)	12mm	1000mm	108leds/m 540leds/5m	20W/m 100W/5m	\
V24584RGBA	RGB	5060LED	24V(71.4mm,6pcs)	10mm	1000mm	84leds/m 420leds/5m	20W/m 100W/5m	\
V245120RGBA	RGB	5060LED	24V(50MM,6PCS)	10mm	1000mm	120leds/m 600leds/5m	25W/m 125W/5m	\
V245120 RGBWC	RGB + W (CW/NW/WW)	5060LED	24V(50mm,6pcs)	12mm	1000mm	120led/m 600leds/5m	30W/m 150W/5m	\
V24596RBCWC	RGB+CW+WW	5060LED	24V(62.5mm,6pcs)	12mm	1000mm	96leds/m 480leds/5m	40W/m 200W/5m	\
DMX Control LED strip								
V24584RGBWC	DMX RGBW	5060LED	24V(83.33mm,7pcs)	12mm	1000mm	84leds/m 420leds/5m	20W/m 100W/5m	\
V24584RGBA-DMX	DMX RGB	5060LED	24V(71.4mm,6pcs)	10mm	1000mm	84leds/m 420leds/5m	20W/m 100W/5m	\
V242120A-DMX	DMX CW/NW/WW	3step 2835LED	24V(50mm,6pcs)	10mm	1000mm	120leds/m 600leds/5m	28W/m 140W/5m	90-95lm/W

LED Strip--Waterproof Version * Maximum length: 10meter




Waterproof A (IP54):
Full silicone tube



Waterproof B (IP68):
Half PU tube + PU gel filling

WP08AL1-NEW IP64 LED Profile

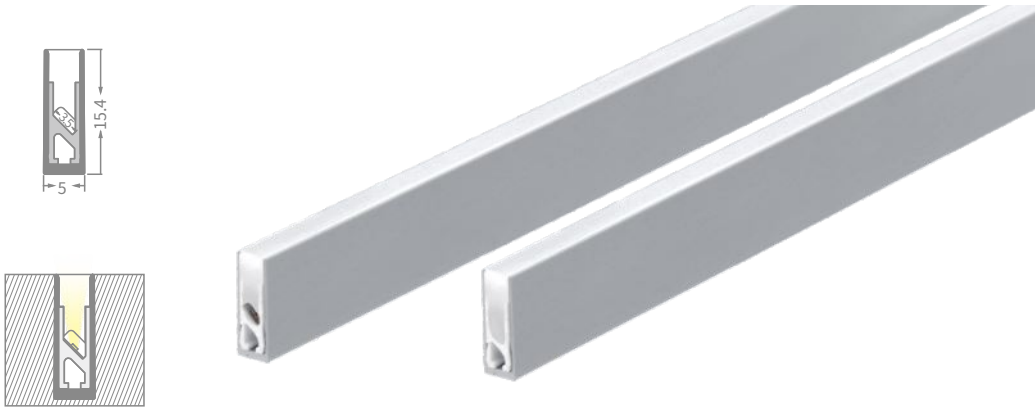

Part No.	Description	Picture	Part No.	Description	Picture
1.05.060.0001 (1m)	Aluminum profile		1.16.060.0008 (1M)	PMMA profile	
1.05.060.0002 (2m)			1.16.060.0007 (2M)		
1.05.060.0003 (3m)			1.16.060.0003 (3.02M)		

Dimension: W5*H15.4*L1000mm
Customized length is available on request
Input voltage:24V DC
Power: 5W/meter
LED qty: 120pcs LED/m
Color TempeRature:1800K-6500K
CRI:Ra ≥80 , Ra ≥90
Beam angle : 110°
Wiring come out: from the end
from bottom

Cable length: 200mm
IP Rating: IP64
Working TempeRature:-40°C~+45
Net weight:117g/meter

WP06AL1 (AP2505AL1) IP64 LED Profile



Part No.	Description	Picture	Part No.	Description	Picture
1.05.025.0002 (1M)	Aluminum profile		1.16.025.0070 (1M)	PMMA profile	
1.05.025.0003 (2M)			1.16.025.0070 (3.02M)		
1.05.025.0001 (3M)					
1.01.07.0058 1.01.05.0001 (M3*16mm)	Stainless steel mounting clip				

Dimension: W13*H16.3*L1000mm
Customized length is available on request
Input voltage:24V DC
Power: 10W/meter
LED qty: 120pcs LED/m
Color TempeRature:1800K-6500K
CRI:Ra ≥80 , Ra ≥90
Beam angle : 170°
Wiring come out: from the end
from bottom

Cable length: 200mm
IP Rating: IP64
Working TempeRature:-40°C~+45
Net weight:270g/meter

AP4105-NEW Mini LED Profile





Part No.	Description	Picture	Part No.	Description	Picture
1.05.041.0018 (3.02m)	Aluminum profile		1.04.02.41.0006 (3.02m)	AP4105-8 PC milky cover	
1.02.04.41.0007	Plastic end cap				

Dimension: W8*H6*L1000mm
Customized length is available on request
Input voltage:24VDC
Power: 10W/meter
LED qty: 180pcs LED/m
Color TempeRature:1800K-6500K
CRI:Ra ≥80 , Ra ≥90
Beam angle : 110°
Wiring come out: from the end
from bottom

Cable length: 200mm
IP Rating: IP20
Working TempeRature:-40°C~+45
Net weight: 59g/meter

AP4101 Mini LED Profile

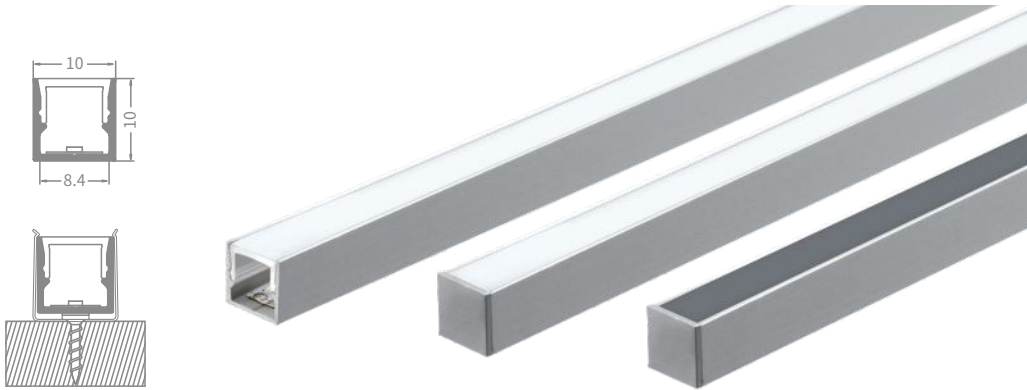


Part No.	Description	Picture	Part No.	Description	Picture
1.05.041.0001 (1m) 1.05.041.0002 (2m)	Aluminum profile		1.02.04.41.0003 (with hole silver) 1.02.04.41.0004 (w/o hole silver)	Plastic end cap	
1.04.03.41.0003 (1m) 1.04.03.41.0004 (2m) 1.04.03.41.0002 (3m)	PA01-9 PMMA frosted cover		1.04.02.41.0003 (1m) 1.04.02.41.0002 (2m) 1.04.02.41.0001 (3.02m)	PC32-9 PC milky cover	
1.04.03.41.0018 (2m)	PA01-9B Black PMMA cover		1.01.07.0064 1.01.05.0001 (M3*16mm)	Stainless steel mounting clip	

Dimension: W10*H10*L1000mm
Customized length is available on request
Input voltage:24V DC
Power: 10W/meter
LED qty: 120pcs LED/m
Color TempeRature:1800K-6500K
CRI:Ra ≥80 , Ra ≥90
Beam angle : 110°
Wiring come out: from the end
from bottom

Cable length: 200mm
IP Rating: IP20
Working TempeRature:-40°C~+45
Net weight: 100g/meter

AP3401 Mini LED Profile




Part No.	Description	Picture	Part No.	Description	Picture
1.05.034.0001 (1m) 1.05.034.0002 (2m)	Aluminum profile		1.02.04.34.0004 (with hole silver) 1.02.04.34.0003 (w/o hole silver)	Plastic end cap	
1.04.02.34.0001 (1m) 1.04.02.34.0002 (2m) 1.04.02.34.0005 (3m)			1.01.07.0036 1.01.05.0030 (M3*16mm)		
	PC11-7 PC milky cover			Stainless steel mounting clip	

Dimension: W9*H15.7*L1000mm
Customized length is available on request
Input voltage:24VDC
Power: 10W/meter
LED qty: 120pcs LED/m
Color TempeRature:1800K-6500K
CRI:Ra ≥80 , Ra ≥90
Beam angle : 110°
Wiring come out: from the end
from bottom

Cable length: 200mm
IP Rating: IP20
Working TempeRature:-40°C~+45
Net weight: 163g/meter

AP4106-NEW Mini LED Profile

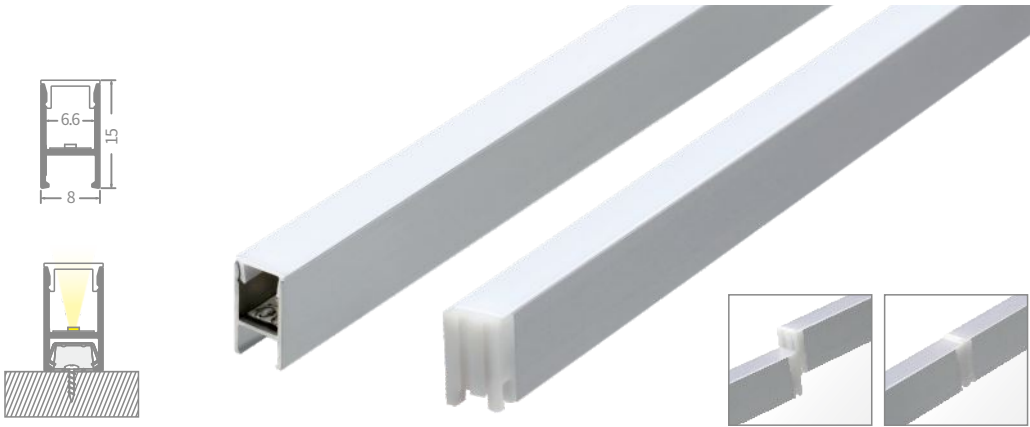

Part No.	Description	Picture	Part No.	Description	Picture
1.05.041.0020 (3.02m)	Aluminum profile		1.01.07.0089 1.01.05.0233 (M2.6*12mm)	Stainless steel mounting clip	
1.04.02.41.0006 (3.02m)			1.02.04.41.0008		
	AP4105-8 PC cover			Plastic end cap	

Dimension: W8*H15*L1000mm
Customized length is available on request
Input voltage:24V DC
Power: 10W/meter
LED qty: 120pcs LED/m
Color TempeRature:1800K-6500K
CRI:Ra ≥80 , Ra ≥90
Beam angle : 110°
Wiring come out:from the end
from Totton

Cable length: 200mm
IP Rating: IP20
Working TempeRature:-40°C~+45
Net weight: 93g/meter

AP3413-NEW LED Profile




Part No.	Description	Picture	Part No.	Description	Picture
1.05.034.0092 (1M) 1.05.034.0093 (2M) 1.05.034.0094 (3M)	Aluminum profile		1.01.07.0085 1.01.05.0233 (M2.6*12mm)	Stainless steel mounting clip	
1.04.02.500.0008 (1M) 1.04.02.500.0009 (2M) 1.04.02.500.0010 (3M)	AP3413-13.5 PC milky cover		1.02.04.34.0046	Plastic end cap	

Dimension: W13.5*H20*L1000mm
Customized length is available on request
Input voltage:24V DC
Power: 10W/meter
LED qty: 120pcs LED/m
Color TempeRature:1800K-6500K
CRI:Ra ≥80 , Ra ≥90
Beam angle : 110°
Wiring come out: from bottom

Cable length: 200mm
IP Rating: IP20
Working TempeRature:-40°C~+45
Net weight: 177g/meter

AP3412-NEW LED Profile

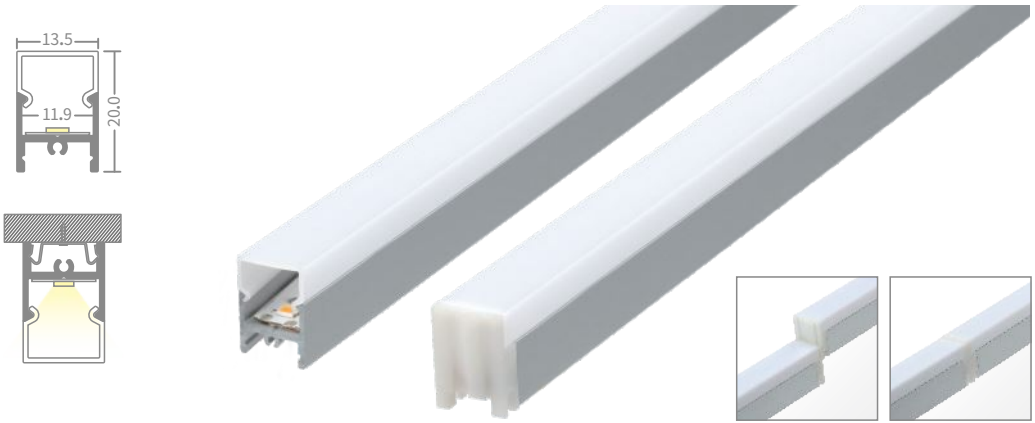

Part No.	Description	Picture	Part No.	Description	Picture
1.05.034.0089 (1M) 1.05.034.0090 (2M) 1.05.034.0091 (3M)	Aluminum profile		1.01.07.0085 1.01.05.0233 (M2*8mm)	Stainless steel mounting clip	
1.04.02.34.0033 (1M) 1.04.02.34.0034 (2M) 1.04.02.34.0035 (3M)	AP3412-14 PC milky cover		1.02.04.34.0048	Plastic end cap	

Dimension: W13.5*H20*L1000mm
Customized length is available on request
Input voltage:24V DC
Power: 10W/meter
LED qty: 120pcs LED/m
Color TempeRature:1800K-6500K
CRI:Ra ≥80 , Ra ≥90
Beam angle : 135°
Wiring come out:from bottom

Cable length: 200mm
IP Rating: IP20
Working TempeRature:-40°C~+45
Net weight: 162g/meter

AP4103-NEW LED Profile




Part No.	Description	Picture	Part No.	Description	Picture
1.05.041.0017 (3.02m)	Aluminum profile		1.01.07.0080 1.01.05.0030 (M3*16mm)	Stainless steel mounting clip	
1.04.02.41.0004 (3.02m)	AP4103-18 PC milky cover		1.02.04.41.0009	Plastic end cap	

Dimension: W19*H25*L1000mm
Customized length is available on request
Input voltage:24V DC
Power: 15W/meter
LED qty: 120pcs LED/m
Color TempeRature:1800K-6500K
CRI:Ra ≥80 , Ra ≥90
Beam angle : 110°
Wiring come out: from bottom

Cable length: 200mm
IP Rating: IP20
Working TempeRature:-40°C~+45
Net weight: 293g/meter

AP3410-NEW LED Profile

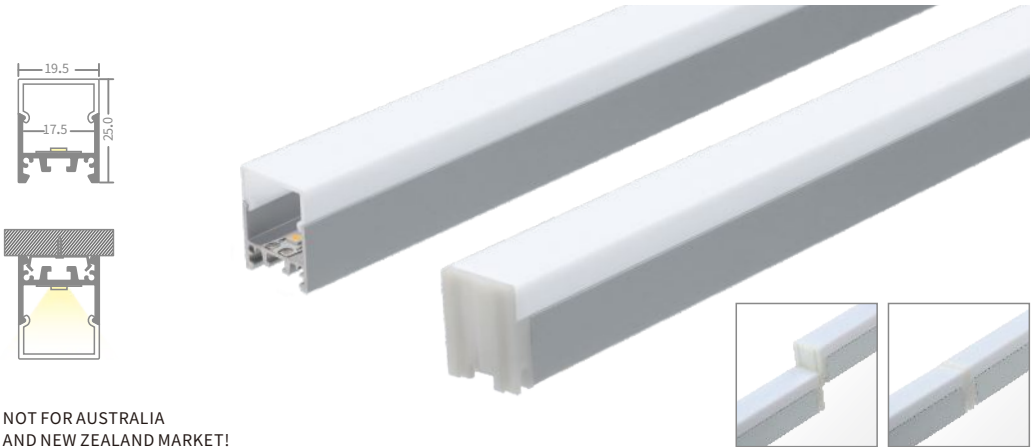

NOT FOR AUSTRALIA
AND NEW ZEALAND MARKET!

Part No.	Description	Picture	Part No.	Description	Picture
1.05.034.0083 (1M) 1.05.034.0084 (2M) 1.05.034.0085 (3M)	Aluminum profile		1.01.07.0080 1.01.05.0030 (M3*16mm)	Stainless steel mounting clip	
1.04.03.50.0001 (1M) 1.04.03.50.0002 (2M) 1.04.03.50.0003 (3M)	PA05-20F PMMA frosted cover		1.02.04.34.0047 1.01.05.0218 (M3*3mm)	Plastic end cap	

Dimension: W19.5*H25*L1000mm
Customized length is available on request
Input voltage:24V DC
Power: 15W/meter
LED qty: 120pcs LED/m
Color TempeRature:1800K-6500K
CRI:Ra ≥80 , Ra ≥90
Beam angle : 135°
Wiring come out:from bottom

Cable length: 200mm
IP Rating: IP20
Working TempeRature:-40°C~+45
Net weight: 266g/meter

AP4104-NEW LED Profile





Part No.	Description	Picture	Part No.	Description	Picture
1.05.041.0019 (3.02m)	Aluminum profile		1.01.07.0088 1.01.05.0030 (M3*16mm)	Stainless steel mounting clip	
1.04.02.41.0007 (2.5m) 1.04.02.41.0005 (3.02m)	AP4104-27 PC milky cover		1.01.04.41.0002 1.01.05.0258 (M2*8mm)	Aluminum end cap Self-tapping screws	

Dimension: W28*H30*L1000mm
Customized length is available on request
Input voltage:24V DC
Power: 25W/meter
LED qty: 240pcs LED/m
Color TempeRature:1800K-6500K
CRI:Ra ≥80 , Ra ≥90
Beam angle : 110°
Wiring come out: from the end
from bottom

Cable length: 200mm
IP Rating: IP20
Working TempeRature:-40°C~+45
Net weight: 384g/meter

AP3411-NEW LED Profile

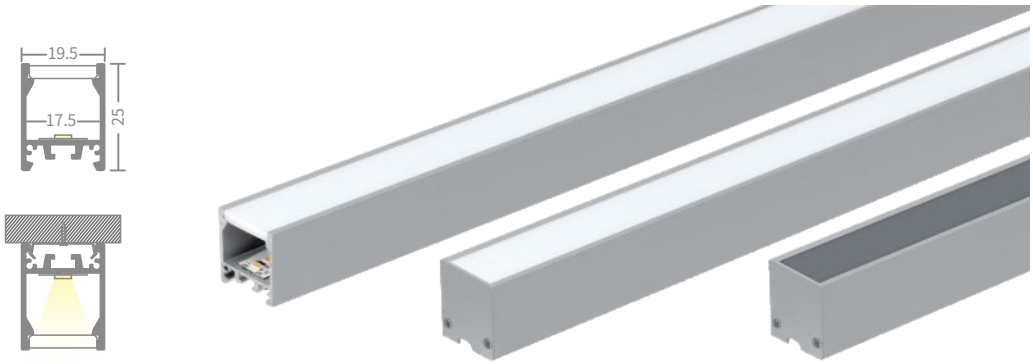

Part No.	Description	Picture	Part No.	Description	Picture
1.05.034.0086 (1M) 1.05.034.0087 (2M) 1.05.034.0088 (3M)	Aluminum profile		1.01.07.0080 1.01.05.0030 (M3*16mm)	Stainless steel mounting clip	
1.04.03.34.0002 (1m) 1.04.03.34.0003 (2m)	PA21-16 PMMA frosted cover		1.01.04.34.0031 1.01.05.0162 (M2*8mm)	Aluminum end cap Self-tapping screws	
1.04.03.34.0019 (2m)	PA21-16B Black PMMA cover				

Dimension: W19.5*H25*L1000mm
Customized length is available on request
Input voltage:24V DC
Power: 20W/meter
LED qty: 120pcs LED/m
Color TempeRature:1800K-6500K
CRI:Ra ≥80 , Ra ≥90
Beam angle : 110°
Wiring come out: from the end
from bottom

Cable length: 200mm
IP Rating: IP20
Working TempeRature:-40°C~+45
Net weight:348g/meter

AP3402 LED Profile



Part No.	Description	Picture	Part No.	Description	Picture
1.05.034.0039 (1m) 1.05.034.0040 (2m)	Aluminum profile		1.02.04.34.0011 (with hole silver) 1.02.04.34.0014 (w/o hole silver) 1.01.05.0310 (M1.8*8mm)	Plastic end cap	
1.04.02.34.0014 (1m) 1.04.02.34.0015 (2m)	PC12-11 PC milky cover		1.01.07.0066 1.01.05.0001 (M3*16mm)	Stainless steel mounting clip	


Dimension: W14.5*H15.7*L1000mm
Customized length is available on request
Input voltage:24V DC
Power: 15W/meter
LED qty: 120pcs LED/m
Color TempeRature:1800K-6500K
CRI:Ra ≥80 , Ra ≥90
Beam angle : 110°
Wiring come out: from the end
from bottom

Cable length: 200mm
IP Rating: IP20
Working TempeRature:-40°C~+45
Net weight: 250g/meter

AP3403 LED Profile



NOT FOR AUSTRALIA
AND NEW ZEALAND MARKET!

Part No.	Description	Picture	Part No.	Description	Picture
1.05.034.0038 (1m) 1.05.034.0034 (2m) 1.05.034.0074 (3m)	Aluminum profile		1.02.04.34.0022 (with hole/silver) 1.02.04.34.0021 (w/o hole/silver) 1.01.05.0310 (M1.8*8mm)	Plastic end cap	
1.04.03.34.0002 (1m) 1.04.03.34.0003 (2m)	PA21-16 PMMA frosted cover		1.01.04.34.0021 (with hole/silver) 1.01.04.34.0022 (w/o hole/silver) 1.01.05.0310 (M1.8*8mm)	Aluminum end cap	
1.04.03.34.0019 (2m)	PA21-16B Black PMMA cover		1.01.07.0062 1.01.05.0030 (M3*16mm)	Stainless steel mounting clip	

Dimension: W19.5*H15.7*L1000mm
Customized length is available on request
Input voltage:24V DC
Power: 20W/meter
LED qty: 120pcs LED/m
Color TempeRature:1800K-6500K
CRI:Ra ≥80 , Ra ≥90
Beam angle : 110°
Wiring come out: from the end
from bottom

Cable length: 200mm
IP Rating: IP20
Working TempeRature:-40°C~+45
Net weight: 264g/meter

AP0101 LED Profile




Part No.	Description	Picture	Part No.	Description	Picture
1.05.001.0016 (1m) 1.05.001.0017 (2m) 1.05.001.0018 (3m)	Aluminum profile		1.01.07.0001 1.01.05.0030 (M3*16mm)	Stainless steel mounting clip	
1.04.03.01.0001 (1m) 1.04.03.01.0002 (2m) 1.04.03.01.0005 (3m)	PA02-15 PMMA frosted cover		1.01.07.0008 1.01.05.0030 (M3*16mm)	Stainless steel mounting clip	
1.04.03.01.0048 (2m)	PA02-15B Black PMMA cover		1.02.07.0010 1.01.05.0001 (M3*16mm)	Extension connector	
1.02.04.01.0003 (with hole) 1.02.04.01.0004 (w/o hole)	Plastic end cap		1.02.08.0005 1.01.05.0001 (M3*16mm)	90° Extension connector	

Dimension: W17.5*H8*L1000mm
Customized length is available on request
Input voltage:24V DC
Power: 15W/meter
LED qty: 120pcs LED/m
Color TempeRature:1800K-6500K
CRI:Ra ≥80 , Ra ≥90
Beam angle : 110°
Wiring come out: from the end
from bottom

Cable length: 200mm
IP Rating: IP20
Working TempeRature:-40°C~+45
Net Weight:153g/meter

AP11 LED Profile



Part No.	Description	Picture	Part No.	Description	Picture
1.05.011.0001 (1m) 1.05.011.0002 (2m) 1.05.011.0003 (3m)	Aluminum profile		1.01.07.0001 1.01.05.0030 (M3*16mm)	Stainless steel mounting clip	
1.04.03.01.0001 (1m) 1.04.03.01.0002 (2m) 1.04.03.01.0005 (3m)	PA02-15 PMMA frosted cover		1.01.07.0008 1.01.05.0030 (M3*16mm)	Stainless steel mounting clip	
1.04.03.01.0048 (2m)	PA02-15B Black PMMA cover		1.02.07.0010 (PC) 1.01.05.0001 (M3*16mm)	Extension connector	
1.02.04.11.0006 (with hole/PC) 1.02.04.11.0005 (w/o hole/PC)	Plastic end cap		1.02.04.11.0003 (with hole/PC) 1.02.04.11.0004 (w/o hole/PC)	Plastic end cap	

Dimension: W17.5*H13*L1000mm
Customized length is available on request
Input voltage:24V DC
Power: 20W/meter
LED qty: 120pcs LED/m
Color TempeRature: 1800K-6500K
CRI:Ra ≥80 , Ra ≥90
Beam angle : 110°
Wiring come out: from the end
from bottom

Cable length: 200mm
IP Rating: IP20
Working TempeRature:-40°C~+45
Net Weight:215g/meter

AP21 LED Profile



Part No.	Description	Picture	Part No.	Description	Picture
1.05.021.0011 (1m) 1.05.021.0012 (2m)	Aluminum profile		1.01.04.21.0001 (with hole) 1.01.04.21.0002 (w/o hole) 1.01.05.0162 (M2*8mm)	Aluminum end cap	
1.04.03.12.0003 (1m) 1.04.03.12.0004 (2m)	PA04-24 PMMA frosted cover		1.01.07.0032 1.01.05.0030 (M3*16mm)	Stainless steel mounting clip	
1.04.03.12.0025 (2m)	PA04-24B Black PMMA cover				

Dimension: W26.6*H15*L1000mm
Customized length is available on request
Input voltage:24V DC
Power:25W/meter
LED qty: 240pcs LED/m
Color TempeRature: 1800K-6500K
CRI:Ra ≥80 , Ra ≥90
Beam angle : 110°
Wiring come out:from the end
from bottom

Cable length: 200mm
IP Rating: IP20
Working TempeRature:-40°C~+45
Net Weight:287g/meter



AP0202 Recessed LED Profile



Part No.	Description	Picture	Part No.	Description	Picture
1.05.002.0001 (1m) 1.05.002.0002 (2m) 1.05.002.0003 (3m)	Aluminum profile		1.01.07.0008 1.01.05.0030 (M3*16mm)	Stainless steel mounting clip	
1.04.03.01.0001 (1m) 1.04.03.01.0002 (2m) 1.04.03.01.0005 (3m)	PA02-15 PMMA frosted cover		1.02.04.02.0004 (with hole) 1.02.04.02.0003 (w/o hole)	Plastic end cap	
1.04.03.01.0048 (2m)	PA02-15B Black PMMA cover				

Dimension: W24.6*H8.3*L1000mm
Customized length is available on request
Input voltage:24V DC
Power: 15W/meter
LED qty: 120pcs LED/m
Color TempeRature: 1800K-6500K
CRI:Ra ≥80 , Ra ≥90
Beam angle : 110°
Wiring come out: from the end
from bottom

Cable length: 200mm
IP Rating: IP20
Working TempeRature:-40°C~+45
Net Weight:210g/meter

AP32 Recessed LED Profile



Part No.	Description	Picture	Part No.	Description	Picture
1.05.032.0008 (1m) 1.05.032.0009 (2m)	Aluminum profile		1.02.04.32.0001 (with hole silver) 1.02.04.32.0002 (w/o hole silver) 1.01.05.0314 (M1.7*8mm)	Plastic end cap	
1.04.02.34.0014 (1m) 1.04.02.34.0015 (2m) 1.04.02.34.0016 (3m)	PC12-11 PC cover		1.01.07.0066 1.01.05.0001 (M3*16mm)	Stainless steel mounting clip	
2.02.AP32.001	Metal fixing holder				

Dimension: W21.6*H15.2*L1000mm
Customized length is available on request
Input voltage:24V DC
Power: 15W/meter
LED qty: 120pcs LED/m
Color TempeRature: 1800K-6500K
CRI:Ra ≥80 , Ra ≥90
Beam angle : 110°
Wiring come out:from the end
from bottom


Cable length: 200mm
IP Rating: IP20
Working TempeRature:-40°C~+45
Net Weight:266g/meter



AP3404 Recessed LED Profile



NOT FOR AUSTRALIA
AND NEW ZEALAND MARKET!

Part No.	Description	Picture	Part No.	Description	Picture
1.05.034.0047 (1m) 1.05.034.0048 (2m)	Aluminum profile		1.02.04.34.0037 (with hole/silver) 1.02.04.34.0038 (w/o hole/silver) 1.01.05.0310 (M1.8*8mm)	Plastic end cap	
1.04.03.34.0002 (1m) 1.04.03.34.0003 (2m)	PA21-16 PMMA frosted cover		2.02.AP3404.001	Metal fixing holder	
1.04.03.34.0019 (2m)	PA21-16B Black PMMA cover		1.01.07.0031 1.01.05.0030 (M3*16mm)	Stainless steel mouting clip	

Dimension: W30*H15.7*L1000mm
Customized length is available on request
Input voltage:24V DC
Power: 20W/meter
LED qty: 120pcs LED/m
Color TempeRature: 1800K-6500K
CRI:Ra ≥80 , Ra ≥90
Beam angle : 110°
Wiring come out: from the end
from bottom

Cable length: 200mm
IP Rating: IP20
Working TempeRature:-40°C~+45
Net Weight:346g/meter

AP12 Recessed LED Profile



Part No.	Description	Picture	Part No.	Description	Picture
1.05.012.0009 (1m) 1.05.012.0010 (2m)	Aluminum profile		1.01.04.12.0002 (with hole) 1.01.04.12.0001 (w/o hole) 1.01.05.0162 (M2*8mm)	Aluminum end cap	
1.04.03.12.0003 (1m) 1.04.03.12.0004 (2m)	PA04-24 PMMA frosted cover		1.01.07.0032 1.01.05.0030 (M3*16mm)	Stainless steel mounting clip	
1.04.03.12.0025 (2m)	PA04-24B Black PMMA cover				

Dimension: W33*H15*L1000mm
Customized length is available on request
Input voltage:24V DC
Power: 25W/meter
LED qty: 240pcs LED/m
Color TempeRature: 1800K-6500K
CRI:Ra ≥80 , Ra ≥90
Beam angle : 110°
Wiring come out:from the end
from bottom

Cable length: 200mm
IP Rating: IP20
Working TempeRature:-40°C~+45
Weight:312g/meter

AP0302 Corner LED Profile



Part No.	Description	Picture	Part No.	Description	Picture
1.05.003.0001 (1m) 1.05.003.0002 (2m) 1.05.003.0003 (3m)	Aluminum profile		1.02.04.03.0004 (with hole) 1.02.04.03.0005 (w/o hole)	Plastic end cap	
1.04.03.01.0001 (1m) 1.04.03.01.0002 (2m) 1.04.03.01.0005 (3m)	PA02-15 PMMA frosted cover		1.01.07.0002 1.01.05.0030 (M3*16mm)	Stainless steel mounting clip	
1.04.03.01.0048 (2m)	PA02-15B Black PMMA cover				

Dimension: W26.7*H18.3*L1000mm
Customized length is available on request
Input voltage:24V DC
Power: 20W/meter
LED qty: 120pcs LED/m
Color TempeRature: 1800K-6500K
CRI:Ra ≥80 , Ra ≥90
Beam angle : 110°
Wiring come out: from the end
from bottom

Cable length: 200mm
IP Rating: IP20
Working TempeRature:-40°C~+45
Net Weight:315g/meter

AP0303 Corner LED Profile




Part No.	Description	Picture	Part No.	Description	Picture
1.05.003.0030 (1m) 1.05.003.0031 (2m)	Aluminum profile		1.02.04.03.0021 (with hole silver) 1.02.04.03.0022 (w/o hole silver)	Plastic end cap	
1.04.02.12.0001 (1m) 1.04.02.12.0002 (2m)	PC04-24 PC milky cover		1.01.07.0028 1.01.05.0030 (M3*16mm)	Metal mounting clip	

Dimension: W46*H18*L1000mm
Customized length is available on request
Input voltage:24V DC
Power: 30W/meter
LED qty: 240pcs LED/m
Color TempeRature: 2400-6500K
CRI:Ra ≥80 , Ra ≥90
Beam angle : 110°
Wiring come out: from the end
from bottom

Cable length: 200mm
IP Rating: IP20
Working TempeRature:-40°C~+45
Net Weight:382g/meter

DP14 Top Ceiling Profile

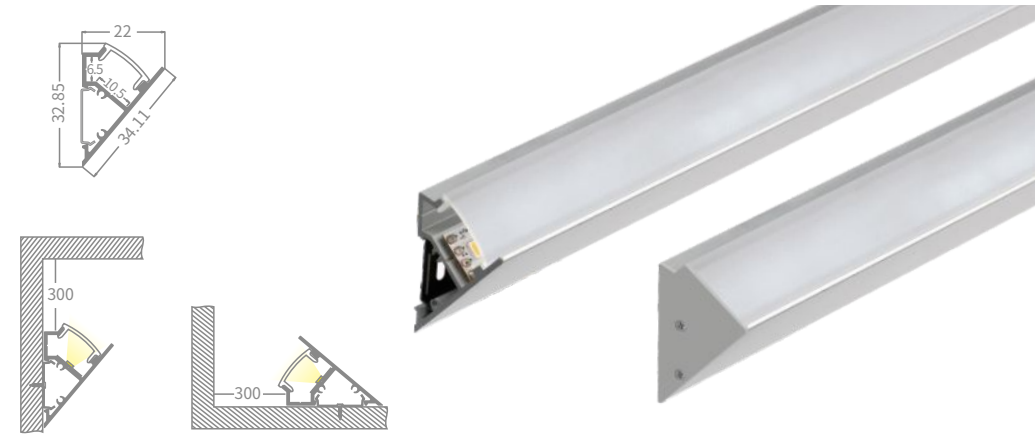

Part No.	Description	Picture	Part No.	Description	Picture
1.05.052.0007 (3m)	Aluminum profile		1.01.07.0080 1.01.05.0030 (M3*16mm)	Stainless steel mounting clip	
1.04.03.01.0014 (1m) 1.04.03.01.0015 (2m) 1.04.03.01.0018 (3m)	PA02-15 PMMA cover		1.01.04.62.0001 (left) 1.01.04.62.0002 (right) 1.01.05.0314 (M1.7*8mm)	Aluminum end cap	

Dimension: W22*H32.85*L1000mm
Customized length is available on request
Input voltage:24V DC
Power: 20W/meter
LED qty: 120pcs LED/m
Color Temperature: 1800K-6500K
CRI:Ra ≥80 , Ra ≥90
Beam angle : 110°
Wiring come out: from the end
from bottom

Cable length: 200mm
IP Rating: IP20
Working Temperature:-40°C~+45
Net Weight:290g/meter

AP1303 LED Profile




Part No.	Description	Picture	Part No.	Description	Picture
1.05.013.0031 (1m) 1.05.013.0030 (2m) 1.05.013.0028 (3m)	aluminum plate		1.16.013.0028 (2M) 1.16.013.0016 (3M)	AP1303-12 PC milky profile	
1.02.04.13.0031 (with hole) 1.02.04.13.0032 (w/o hole)	Plastic end cap		1.01.07.0057 1.01.05.0001 (M3*16mm)	Stainless steel mounting clip	

Dimension: W16.8*H12.7*L1000mm
Customized length is available on request
Input voltage:24V DC
Power: 10W/meter
LED qty: 120pcs LED/m
Color Temperature:1800K-6500K
CRI:Ra ≥80 , Ra ≥90
Beam angle : 110°
Wiring come out: from the end
from bottom

Cable length: 200mm
IP Rating: IP20
Working Temperature:-40°C~+45
Net Weight:86g/meter

TP03A 70° Asymmetric linear light



Part No.	Description	Picture	Part No.	Description	Picture
1.05.500.0082 (3.02m)	Aluminum profile		1.04.03.98.0022 (3.02m)	Tp03 Asymmetric PMMA cover	
1.02.04.99.0044	Plastic end cap		1.01.07.0107 1.01.05.0030 (M3*16mm)	Stainless steel mounting clip	

Dimension: W13.5*H8.6*L1000mm
Customized length is available on request
Input voltage:24V DC
Power: 10W/meter
LED qty: 140pcs LED/m
Color TempeRature: 1800K-6500K
CRI:Ra ≥80 , Ra ≥90
Beam angle: Asymmetric 70°
Wiring come out: from the end
from bottom

Cable length: 200mm
IP Rating: IP20
Working TempeRature:-40°C~+45



Picture For Asymmetric TRack Linear

AP4501 Asymmetric LED Profile



Part No.	Description	Picture	Part No.	Description	Picture
1.05.045.0007 (1m) 1.05.045.0006 (2m) 1.05.045.0005 (3.02m)	Aluminum profile		1.04.03.45.0002 (1m) 1.04.03.45.0004 (2m) 1.04.03.45.0005 (3m)	PAB04-16 PMMA Asymmetric cover	
1.01.04.45.0001 (with hole) 1.01.04.45.0002 (w/o hole) 1.01.05.0314 (M1.7*8mm)	Aluminum end cap		1.01.07.0059 1.01.05.0030 (M3*16mm)	Stainless steel mounting clip	

Dimension: W16*H11.8*L1000mm
Customized length is available on request
Input voltage:24V DC
Power: 15W/meter
LED qty: 120pcs LED/m
Color TempeRature:1800K-6500K
CRI:Ra ≥80 , Ra ≥90
Beam angle : Asymmetric 85°
Wiring come out: from bottom

Cable length: 200mm
IP Rating: IP20
Working TempeRature:-40°C~+45
Net Weight:209g/meter

AP4102-NEW LED Profile



Beam Angle: 40°

Part No.	Description	Picture	Part No.	Description	Picture
1.05.041.0001 (1m)	Aluminum profile		1.02.04.41.0010 (with hole)	Plastic end cap	
1.05.041.0002 (2m)			1.02.04.41.0011 (w/o hole)		
1.05.041.0015 (1m)	Aluminum plate		1.02.04.41.0012	Plastic end cap	
1.05.041.0016 (2m)					
1.04.03.41.0017 (1M)	PAB06-9 PMMA cover		1.01.07.0064	Stainless steel mounting clip	
1.04.03.41.0016 (2M)			1.01.05.0001 (M3*16mm)		
1.04.03.41.0015 (3M)					

Dimension: W10*H14.5*L1000mm
Customized length is available on request
Input voltage: 24V DC
Power: 10W/meter
LED qty: 120pcs LED/m
Color Temperature: 1800K-6500K
CRI: Ra ≥ 80, Ra ≥ 90
Beam angle: 40°
wiring come out: from the end
from bottom

Cable length: 200mm
IP Rating: IP20
Working Temperature: -40°C~+45
Net Weight: 188g/meter

AP0705-NEW LED Profile



Beam Angle:45°

Part No.	Description	Picture	Part No.	Description	Picture
1.05.007.0021 (3.02m)	Aluminum profile		1.01.07.0085 1.01.05.0233 (M2.6*12mm)	Stainless steel mounting clip	
1.04.03.07.0009 (3m)	PAB05-15 PMMA frosted surface		1.02.04.07.0001 1.01.05.0218 (M3*3mm)	Plastic end cap	

Dimension: W15.5*H23*L1000mm
Customized length is available on request
Input voltage:24V DC
Power: 15W/meter
LED qty: 120pcs LED/m
Color Temperature:1800K-6500K
CRI:Ra ≥80 , Ra ≥90
Beam angle : 45°
Wiring come out: from bottom

Cable length: 200mm
IP Rating: IP20
Working Temperature: -40°C~+45

AP0702 LED Profile



Part No.	Description	Picture	Part No.	Description	Picture
1.05.007.0001 (1m)	Aluminum profile		1.01.04.07.0014 (with hole)	Aluminum end cap	
1.05.007.0002 (2m)			1.01.04.07.0013 (w/o hole)		
			1.01.05.0232 (M2.7*10mm)		
1.04.03.07.0012 (1m)	PAB05-15 PMMA cover		2.02.HS.001	Adjustable stainless steel holder can be turned around 180°	
1.04.03.07.0011 (2m)					

Dimension: W19*H23.5*L1000mm
Customized length is available on request
Input voltage:24V DC
Power: 20W/meter
LED qty: 120pcs LED/m
Color Temperature:1800K-6500K
CRI:Ra ≥80 , Ra ≥90
Beam angle : 55°
Wiring come out: from the end
from bottom

Cable length: 200mm
IP Rating: IP20
Working Temperature:-40°C~+45
Net Weight:399g/meter

AP0701 LED Profile



Part No.	Description	Picture	Part No.	Description	Picture
1.05.007.0001 (1m)	Aluminum profile		1.01.04.07.0001 (with hole)	Aluminum end cap	
1.05.007.0002 (2m)			1.01.04.07.0002 (w/o hole)		
1.05.007.0004 (3m)			1.01.05.0232 (M2.7*10mm)		
1.04.03.01.0001 (1m)	PA02-15 PMMA cover		2.02.HS.001	Adjustable stainless steel holder can be turned around 180°	
1.04.03.01.0002 (2m)					
1.04.03.01.0005 (3m)					

Dimension: W19*H20*L1000mm
Customized length is available on request
Input voltage:24V DC
Power: 20W/meter
LED qty: 120pcs LED/m
Color Temperature:1800K-6500K
CRI:Ra ≥80 , Ra ≥90
Beam angle : 110°
Wiring come out: from the end
from bottom

Cable length: 200mm
IP Rating: IP20
Working Temperature:-40°C~+45
Net Weight:372g/meter

AP0703 LED Profile



Part No.	Description	Picture	Part No.	Description	Picture
1.05.007.0016 (1m) 1.05.007.0018 (2m)	Aluminum profile		1.01.04.07.0025 (with hole) 1.01.04.07.0026 (w/o hole) 1.01.05.0232 (M2.7*10mm)	Aluminum end cap	
1.04.03.01.0001 (1m) 1.04.03.01.0002 (2m) 1.04.03.01.0005 (3m)	PA02-15 PMMA cover				

Dimension: W19*H23.7*L1000mm
Customized length is available on request
Input voltage:24V DC
Power: 20W/meter
LED qty: 120pcs LED/m
Color TempeRature:1800K-6500K
CRI:Ra ≥80 , Ra ≥90
Beam angle : 100°
Wiring come out: from the end
from bottom

Cable length: 200mm
IP Rating: IP20
Working TempeRature:-40°C~+45
Net Weight:450g/meter

CP02 (AP3701) Sensor Wardrobe Alu LED Profile



Part No.	Description	Picture	Part No.	Description	Picture
1.05.037.0010 (1m) 1.05.037.0011 (2m) 1.05.037.0012 (3m)	Aluminum profile		1.01.06.0035 1.01.05.0164 (M4*15mm)	Fixing holder	
1.04.02.37.0028 (1m) 1.04.02.37.0026 (2m)	PC14-10 PC milky cover		1.01.06.0037 1.01.05.0164 (M4*15mm)	Fixing clip	
1.02.04.37.0003 (with hole silver) 1.02.04.37.0004 (w/o hole silver)	Plastic end cap		1.05.037.0035 (1m) 1.05.037.0036 (2m) 1.05.037.0037 (3m)	Aluminum Plate	

Dimension: W14.5*H28*L1000mm
Customized length is available on request
Input voltage:24V DC
Power: 10W/meter
LED qty: 120pcs LED/m
Color TempeRature:1800K-6500K
CRI:Ra ≥80 , Ra ≥90
Beam angle : 110°
Wiring come out: from the end

Cable length: 200mm
IP Rating: IP20
Working TempeRature:-40°C~+45
Net Weight:331g/meter



CP03 (AP3702) Wardrobe Alu LED Profile



NOT FOR USA MARKET !

Part No.	Description	Picture	Part No.	Description	Picture
1.05.037.0072 (1m) 1.05.037.0073 (2m) 1.05.037.0074 (3m)	Aluminum profile		1.01.04.37.0011 (with hole) 1.01.04.37.0012 (w/o hole) 1.01.05.0156 (M2.6*10mm)	Aluminum end cap	
1.04.02.37.0043 (1m)	PC03-15 PC milky cover		1.01.06.0046 (A) 1.01.06.0047 (B)	Fixingholder	
1.01.08.0070 1.01.05.0164 (M4*15mm)	Fixingholder		1.01.05.0037 (M3*10mm) 1.01.05.0164 (M4*15mm)		

Dimension: Ø30*L1000mm
Customized length is available on request
Input voltage:24V DC
Power: 20W/meter
LED qty: 120pcs LED/m
Color TempeRature:1800K-6500K
CRI:Ra ≥80 , Ra ≥90
Beam angle: 110°
Wiring come out: from the end

Cable length: 200mm
IP Rating: IP20
Working TempeRature:-40°C~+45
Net Weight:903g/meter

AP27 Tube LED Profile



NOT FOR USA MARKET !

Part No.	Description	Picture	Part No.	Description	Picture
1.05.027.0001 (1m) 1.05.027.0002 (2m)	Aluminum profile		1.01.04.23.0001 (with hole) 1.01.04.23.0002 (w/o hole) 1.01.05.0183 (M2*8mm)	Aluminum end cap	
1.04.02.27.0001 (1m) 1.04.02.27.0002 (2m)	PC07-13 PC milky cover		1.01.07.0013 1.01.05.0001 (M3*16mm)	Stainless steel mounting clip	

Dimension: Ø15.8*L1000mm
Customized length is available on request
Input voltage:24V DC
Power: 15W/meter
LED qty: 120pcs LED/m
Color TempeRature:1800K-6500K
CRI:Ra ≥80 , Ra ≥90
Beam angle : 120°
Wiring come out: from the end

Cable length: 200mm
IP Rating: IP20
Working TempeRature:-40°C~+45
Net Weight:58.9g/meter

AP2701 Tube LED Profile



Part No.	Description	Picture	Part No.	Description	Picture
1.05.027.0010 (1m) 1.05.027.0017 (2m)	Aluminum plate		1.02.04.27.0001 (with hole) 1.02.04.27.0002 (w/o hole)	Plastic end cap	
1.04.02.27.0011 (1m)	PC09-D16 PC milky cover		1.01.07.0013 1.01.05.0001 (M3*16mm)	Stainless steel mounting clip	

Dimension: Ø15.8*L1000mm
Customized length is available on request
Input voltage:24V DC
Power: 10W/meter
LED qty: 120pcs LED/m
Color TempeRature:1800K-6500K
CRI:Ra ≥80 , Ra ≥90
Beam angle : 150°
Wiring come out: from the end

Cable length: 200mm
IP Rating: IP20
Working TempeRature:-40°C~+45
Net Weight:93g/meter

AP13 LED Profile



Part No.	Description	Picture	Part No.	Description	Picture
1.16.013.0001 (1M) 1.16.013.0002 (2M) 1.16.013.0003 (3M)	AP13-12F PMMA frosted profile		1.02.04.13.0001 (with hole) 1.02.04.13.0002 (w/o hole)	Plastic end cap	
1.16.013.0004 (1M) 1.16.013.0005 (2M) 1.16.013.0006 (3M)	AP13-12M PMMA milky profile		1.02.07.0029 1.01.05.0229 (M3*16mm)	Plastic mounting clip	

Dimension: W12*H12*L1000mm
Customized length is available on request
Input voltage:24V DC
Power: 10W/meter
LED qty: 120pcs LED/m
Color TempeRature:1800K-6500K
CRI:Ra ≥80 , Ra ≥90
Beam angle : 160°
Wiring come out: from the end

Cable length: 200mm
IP Rating: IP20
Working TempeRature:-40°C~+45

DP01 (AP4301) Step Light LED Profile



Part No.	Description	Picture	Part No.	Description	Picture
1.05.043.0001 (1m)	Aluminum profile		1.04.02.41.0003 (1m)	PC32-9 PC milky cover	
1.05.043.0002 (2m)			1.04.02.41.0002 (2m)		
1.05.043.0003 (3m)			1.04.02.41.0001 (3.02m)		
1.01.04.43.0001 (A)	Aluminum end cap				
1.01.04.43.0002 (B)					
1.01.05.0162 (M2*8mm)					

Dimension: W64.27*H29*L1000mm
Customized length is available on request
Input voltage:24V DC
Power: 10W/meter
LED qty: 120pcs LED/m
Color TempeRature:1800K-6500K
CRI:Ra ≥80 , Ra ≥90
Beam angle : 110°
Wiring come out: from bottom

Cable length: 200mm
IP Rating: IP20
Working TempeRature:-40°C~+45
Net Weight:835g/meter



DP06(AP3301) Plaster Construction LED Profile




Part No.	Description	Picture	Part No.	Description	Picture
1.05.033.0001 (1m)	Aluminum profile		1.02.04.34.0011 (with hole/silver)	Plastic end cap	
1.05.033.0002 (2m)			1.02.04.34.0014 (w/o hole/silver)		
1.05.033.0003 (3m)			1.01.05.0314 (M1.7*8mm)		
1.04.02.34.0014 (1m)	PC12-11 PC milky cover				
1.04.02.34.0015 (2m)					
1.04.02.34.0016 (3m)					

Dimension: W58.5*H15.7*L1000mm
Customized length is available on request
Input voltage:24V DC
Power: 10W/meter
LED qty: 120pcs LED/m
Color TempeRature:1800K-6500K
CRI:Ra ≥80 , Ra ≥90
Beam angle : 110°
Wiring come out: from bottom

Cable length: 200mm
IP Rating: IP20
Working TempeRature:-40°C~+45

DP07 (AP3304) Plaster Construction LED Profile




Part No.	Description	Picture	Part No.	Description	Picture
1.05.033.0031 (1m) 1.05.033.0032 (2m) 1.05.033.0033 (3m)	Aluminum profile		1.02.04.33.0031 (with hole/silver) 1.02.04.33.0032 (w/o hole/silver)	Plastic end cap	
1.04.02.34.0014 (1m) 1.04.02.34.0015 (2m) 1.04.02.34.0016 (3m)	PC12-11 PC milky cover				

Dimension: W35.2*H14.5*L1000mm
Customized length is available on request
Input voltage:24V DC
Power: 10W/meter
LED qty: 120pcs LED/m
Color TempeRature:1800K-6500K
CRI:Ra ≥80 , Ra ≥90
Beam angle : 110°
Wiring come out: from bottom

Cable length: 200mm
IP Rating: IP20
Working TempeRature:-40°C~+45
Net Weight:86g/meter

DP10 (AP3305) Plaster Construction LED Profile



Part No.	Description	Picture	Part No.	Description	Picture
1.05.033.0045 (1m) 1.05.033.0046 (2m)	Aluminum profile		1.04.03.33.0001 (1m) 1.04.03.33.0002 (2m)	PA09-18 PMMA milky cover	
1.01.04.33.0041 1.01.05.0162 (M2*8mm)	Aluminum end cap		1.04.03.33.0007 (2m)	PA09-18B Black PMMA cover	

Dimension: W42*H20*L1000mm
Customized length is available on request
Input voltage:24V DC
Power: 20W/meter
LED qty: 120pcs LED/m
Color TempeRature:1800K-6500K
CRI:Ra ≥80 , Ra ≥90
Beam angle : 110°
Wiring come out: from the side

Cable length: 200mm
IP Rating: IP20
Working TempeRature:-40°C~+45

DP08 (AP1201) Plaster Construction LED Profile



Part No.	Description	Picture	Part No.	Description	Picture
1.05.012.0029 (1m) 1.05.012.0030 (2m) 1.05.012.0028 (3.02m)	Aluminum profile		1.01.04.21.0007 (with hole) 1.01.04.21.0008 (w/o hole) 1.01.05.0162 (M2*8mm)	Aluminum end cap	
1.04.03.12.0003 (1m) 1.04.03.12.0004 (2m)	PA04-24 PMMA frosted cover				

Dimension: W64*H15.5*L1000mm
Customized length is available on request
Input voltage:24V DC
Power: 15W/meter
LED qty: 240pcs LED/m
Color TempeRature:1800K-6500K
CRI:Ra ≥80 , Ra ≥90
Beam angle : 120°
Wiring come out: from bottom
from the end

Cable length: 200mm
IP Rating: IP20
Working TempeRature:-40°C~+45

DP11 (AP3601) Wall Lamp



Part No.	Description	Picture	Part No.	Description	Picture
1.05.036.0001 (1m) 1.05.036.0002 (2m)	Aluminum profile		1.02.04.36.0001 (white) 1.02.04.36.0002 (silver) 1.01.05.0083 (ST3*10)	Plastic end cap	
1.04.02.12.0012 (1m) 1.04.02.12.0010 (2m) 1.04.02.12.0009 (3.02m)	PC04-24 PC cover		1.05.036.0013 1.01.05.0032 (M4*16mm)	Aluminum fixing holder	

Dimension: W88*H27.1*L1000mm
Customized length is available on request
Input voltage:24V DC
Power: 20W/meter
LED qty: 240pcs LED/m
Color TempeRature:1800K-6500K
CRI:Ra ≥80 , Ra ≥90
Beam angle : 90°
Wiring come out: from the side

Cable length: 200mm
IP Rating: IP20
Working TempeRature:-40°C~+45
Net Weight:979g/meter

OP3503 TTrack Rail Light LED Profile



Part No.	Description	Picture	Part No.	Description	Picture
1.05.035.0051 (1m) 1.05.035.0056 (2m)	Aluminum profile		1.05.035.0055 (1m) 1.05.035.0060 (2m) 1.01.05.0030 (M3*16mm)	Aluminum fixing holder	
1.04.02.35.0001 (3.02m)	PC20-35 PC milky cover		1.01.04.35.0021 1.01.05.0156 (M2.6x10 mm)	Aluminum end cap	
1.01.06.0033	Stainless steel rope 1.5 meter length				

Dimension: W35*H50*L1000mm
Customized length is available on request
Input voltage:24V DC
Power: 30W/meter
LED qty: 240pcs LED/m
Color TempeRature:1800K-6500K
CRI:Ra ≥80 , Ra ≥90
Beam angle : 190°
Wiring come out: from bottom

Cable length: 200mm
IP Rating: IP20
Working TempeRature:-40°C~+45
Net Weight:641g/meter

OP3504 TTrack Rail Light LED Profile



Part No.	Description	Picture	Part No.	Description	Picture
1.05.035.0052 (1m) 1.05.035.0076 (2m) 1.05.035.0069 (3m)	Aluminum profile		1.05.035.0055 (1m) 1.05.035.0060 (2m) 1.01.05.0030 (M3*16mm)	Aluminum fixing holder	
1.04.02.35.0001 (3.02m)	PC20-35 PC milky cover		1.01.04.35.0022 1.01.05.0156 (M2.6x10 mm)	Aluminum end cap	
1.01.06.0033	Stainless steel rope 1.5 meter length				

Dimension: W35*H65*L1000mm
Customized length is available on request
Input voltage:24V DC
Power: 30W/meter
LED qty: 240pcs LED/m
Color TempeRature:1800K-6500K
CRI:Ra ≥80 , Ra ≥90
Beam angle : 190°
Wiring come out: from bottom

Cable length: 200mm
IP Rating: IP20
Working TempeRature:-40°C~+45
Net Weight:929g/meter

OP3502 TRack Rail Light LED Profile



NOT FOR AUSTRALIA
AND NEW ZEALAND MARKET!

Part No.	Description	Picture	Part No.	Description	Picture
1.05.035.0052 (1m) 1.05.035.0076 (2m) 1.05.035.0069 (3m)	Aluminum profile		1.05.035.0054 (1m) 1.05.035.0059 (2m) 1.01.05.0030 (M3*16mm)	Aluminum fixing holder	
1.04.02.35.0013 (1m) 1.04.02.35.0012 (2m) 1.04.02.35.0011 (3.02m)	PC38-33 PC milky cover		1.01.04.35.0004 1.01.05.0156 (M2.6x10 mm)	Aluminum end cap	
1.01.06.0033	Stainless steel rope 1.5 meter length		1.01.08.0118 1.01.05.0207 (M4*4 mm)	Extension connector	

Dimension: W35*H35*L1000mm
Customized length is available on request
Input voltage:24V DC
Power: 30W/meter
LED qty: 240pcs LED/m
Color TempeRature:1800K-6500K
CRI:Ra ≥80 , Ra ≥90
Beam angle : 110°
Wiring come out: from bottom

Cable length: 200mm
IP Rating: IP20
Working TempeRature:-40°C~+45
Net Weight:851g/meter

OP3506 TRack Rail Light LED Profile




NOT FOR AUSTRALIA
AND NEW ZEALAND MARKET!


Part No.	Description	Picture	Part No.	Description	Picture
1.05.035.0053 (1m) 1.05.035.0058 (2m)	Aluminum profile		1.01.04.35.0023 1.01.05.0156 (M2.6x10 mm)	Aluminum end cap	
1.04.02.35.0004 (1m) 1.04.02.35.0003 (2m) 1.04.02.35.0002 (3.02m)	PC33-35 PC cover		2.02.HS.003	Spring bRacket	
1.01.08.0092 1.01.05.0218 (M3*3 mm)	Extension connector Self-tapping screws				

Dimension: W45*H30*L1000mm
Customized length is available on request
Input voltage:24V DC
Power: 30W/meter
LED qty: 240pcs LED/m
Color TempeRature:1800K-6500K
CRI:Ra ≥80 , Ra ≥90
Beam angle : 110°
Wiring come out: from bottom

Cable length: 200mm
IP Rating: IP20
Working TempeRature:-40°C~+45
Net Weight:744g/meter

OP04 (AP2402) Office Commercial Light LED Profile

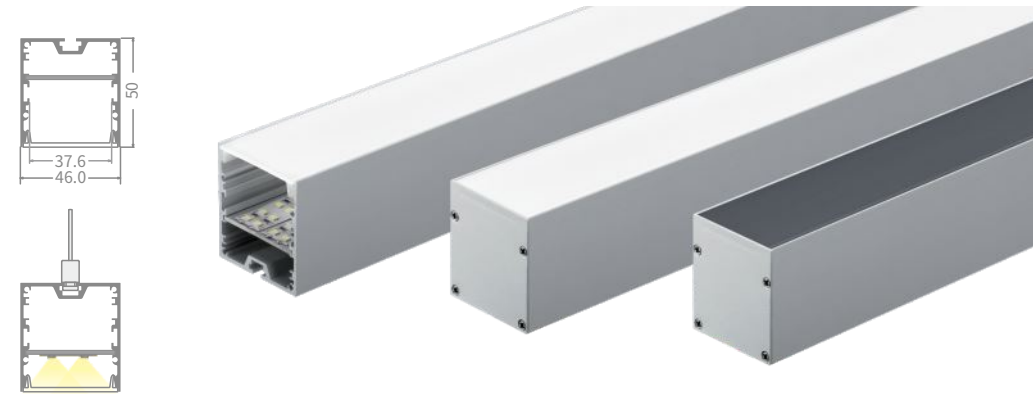

Part No.	Description	Picture	Part No.	Description	Picture
1.05.024.0038 (1m) 1.05.024.0039 (2m)	Aluminum profile		1.02.04.24.0012 (with hole silver) 1.02.04.24.0011 (w/o hole silver) 1.01.05.0156 (M2.6*10mm)	Plastic end cap	
1.04.03.24.0004 (1m) 1.04.03.24.0003 (2m)	PA10-43 PMMA milky cover		1.05.024.0011 (1m) 1.05.024.0012 (2m)	Aluminum Plate	
1.04.03.24.0020 (2m)	PA10-43B Black PMMA cover		1.01.06.0033	Stainless steel rope 1.5 meter length	

Dimension: W46*H50*L1000mm
Customized length is available on request
Input voltage:24V DC
Power: 40W/meter
LED qty: 360pcs LED/m
Color TempeRature:1800K-6500K
CRI:Ra ≥80 , Ra ≥90
Beam angle : 110°
Wiring come out: from bottom

Cable length: 200mm
IP Rating: IP20
Working TempeRature:-40°C~+45
Net Weight:1334g/meter

OP03 (AP2401) Office Commercial Light LED Profile




Part No.	Description	Picture	Part No.	Description	Picture
1.05.024.0055 (1m) 1.05.024.0056 (2m)	Aluminum profile		1.01.04.24.0004 (with hole) 1.01.04.24.0003 (w/o hole) 1.01.05.0156 (M2.6*10mm)	Aluminum end cap	
1.04.03.24.0004 (1m) 1.04.03.24.0003 (2m)	PA10-43 PMMA milky cover		1.05.024.0011 (1m) 1.05.024.0012 (2m)	Aluminum Plate	
1.04.03.24.0020 (2m)	PA10-43B Black PMMA cover		1.01.07.0063	Spring bRacket	

Dimension: W62*H50*L1000mm
Customized length is available on request
nput voltage:24V DC
Power: 40W/meter
LED qty: 360pcs LED/m
Color TempeRature:1800K-6500K
CRI:Ra ≥80 , Ra ≥90
Beam angle : 110°
Wiring come out: from bottom

Cable length: 200mm
IP Rating: IP20
Working TempeRature:-40°C~+45
Net Weight:1316g/meter

OP07(AP1901) Office Commercial Light LED Profile

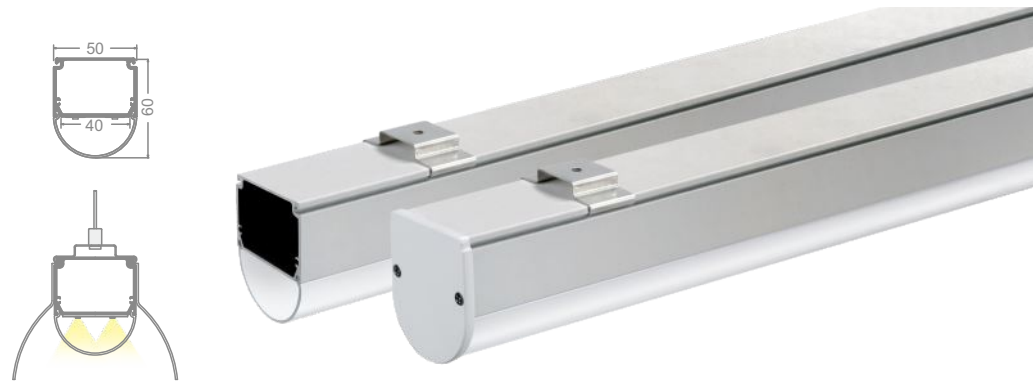

Part No.	Description	Picture	Part No.	Description	Picture
1.05.019.0040 (1m)	Aluminum profile		1.01.07.0005 1.01.05.0032 (M4*16mm)	Stainless steel mounting clip	
1.04.02.19.0003 (1m)	PC19-D50 PC milky cover		1.02.04.19.0004 (with hole) 1.02.04.19.0005 (w/o hole) 1.01.05.0083 (ST3*10)	Plastic end cap	
1.01.06.0033	Stainless steel rope 1.5 meter length				

Dimension: W50*H60*L1000mm
Customized length is available on request
Input voltage:24V DC
Power: 40W/meter
LED qty: 360pcs LED/m
Color TempeRature:1800K-6500K
CRI:Ra ≥80 , Ra ≥90
Beam angle : 140°
Wiring come out: from the end
from bottom

Cable length: 200mm
IP Rating: IP20
Working TempeRature:-40°C~+45
Net Weight:970g/meter

OP08 (AP1902) Office Commercial Light LED Profile



Part No.	Description	Picture	Part No.	Description	Picture
1.05.019.0040 (1m)	Aluminum profile		1.04.02.19.0010 (1m)	PC18-50 PC milky cover	
1.01.06.0033	Stainless steel rope 1.5 meter length		1.02.04.19.0011 (with hole) 1.02.04.19.0010 (w/o hole) 1.01.05.0083 (ST3*10)	Plastic end cap	
1.01.07.0005 1.01.05.0032 (M4*16mm)	Stainless steel mounting clip				

Dimension: W50*H56*L1000mm
Customized length is available on request.)
Input voltage:24V DC
Power: 40W/meter
LED qty: 360pcs LED/m
Color TempeRature:1800K-6500K
CRI:Ra ≥80 , Ra ≥90
Beam angle : 140°
Wiring come out: from the end
from bottom

Cable length: 200mm
IP Rating: IP20
Working TempeRature:-40°C~+45
Net Weight:975g/meter

OP01 (AP3801) Office Commercial Light LED Profile



Part No.	Description	Picture	Part No.	Description	Picture
1.05.038.0003 (1m) 1.05.038.0004 (2m)	Aluminum profile		1.01.04.38.0001 1.01.05.0156 (M2.6*10mm)	Aluminum end cap	
1.04.02.38.0001 (1m) 1.04.02.38.0002 (2m)	PC15-D60 PC milky cover		1.01.06.0078	Stainless steel rope 1.5 meter length	

Dimension: Ø60*L1000mm
Customized length is available on request
Input voltage:24V DC
Power: 40W/meter
LED qty: 240pcs LED/m
Color TempeRature:1800K-6500K
CRI:Ra ≥80 , Ra ≥90
Beam angle : 170°
Wiring come out: from bottom

Cable length: 200mm
IP Rating: IP20
Working TempeRature:-40°C~+45
Net Weight:774g/meter

OP02 (AP3802) Office Commercial Light LED Profile



Part No.	Description	Picture	Part No.	Description	Picture
1.05.038.0030 (1m) 1.05.038.0031 (2m)	Aluminum profile		1.01.04.38.0011 1.01.05.0209 (M3*5mm)	Aluminum end cap	
1.04.02.38.0011 (1m) 1.04.02.38.0012 (2m)	PC16-D100 PC milky cover		1.01.06.0078	Stainless steel rope 1.5 meter length	

Dimension: Ø100*L1000mm
Customized length is available on request
Input voltage:24V DC
Power: 60W/meter
LED qty: 360pcs LED/m
Color TempeRature:1800K-6500K
CRI:Ra ≥80 , Ra ≥90
Beam angle : 170°
Wiring come out: from bottom

Cable length: 200mm
IP Rating: IP20
Working TempeRature:-40°C~+45
Net Weight:1119g/meter